

Product data sheet

Specifications



regulated power supply, Phaseo, 100 to 240 V, 24 V, 3 A

ABL8REM24030

⚠ Discontinued on: Dec 1, 2020

Product availability: Non-Stock - Not normally stocked in distribution facility

⚠ Discontinued

Main

Range of Product	Modicon Power Supply
Product or Component Type	Power supply
Power supply type	Regulated switch mode
Nominal input voltage	100...240 V AC phase to phase L1-L2 100...240 V AC single phase N-L1 110...220 V DC
Kw Rating	72 W
Output voltage	24 V DC
Power supply output current	3 A

Complementary

Efficiency at full load	85...264 V AC 100...250 V AC
Input protection type	Integrated fuse (not interchangeable)
Inrush current	30 A
Power factor	0.65 at 24 V DC
Efficiency	85 %
Output voltage adjustment	100...120 % adjustable
Power dissipation in W	12.7 W
Current consumption	0.83 A 240 V AC 1.46 A 100 V AC
Output protection type	Against overload, protection technology: $1.1 \times I_n$ Against overvoltage, protection technology: tripping if $U > 1.5 \times U_n$ Against short-circuits, protection technology: automatic reset Against undervoltage, protection technology: tripping if $U < 0.8 \times U_n$
Connections - terminals	Screw type terminals $2 \times 0.14...2 \times 2.5 \text{ mm}^2$, AWG 26...AWG 14) input connection Screw type terminals $1 \times 0.14...1 \times 2.5 \text{ mm}^2$, AWG 26...AWG 14) input ground connection Screw type terminals $2 \times 0.14...2 \times 2.5 \text{ mm}^2$, AWG 26...AWG 14) output connection Screw type terminals $1 \times 0.14...1 \times 2.5 \text{ mm}^2$, AWG 26...AWG 14) output ground connection
Status LED	1 LED (Green) output voltage 1 LED (Orange) input voltage
Depth	4.7 in (120 mm)
Height	4.7 in (120 mm)
Width	1.06 in (27 mm)
Product Weight	1.15 lb(US) (0.52 kg)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Output coupling	Parallel Series
Marking	CE
Mounting support	35 x 15 mm symmetrical DIN rail 35 x 7.5 mm symmetrical DIN rail 75 x 7.5 mm symmetrical DIN rail
Operating position	Vertical
Supply	SELV IEC 60950-1 SELV IEC 60204-1 SELV IEC 60364-4-41
Dielectric strength	3000 V with between input and ground 3000 V with between input and output 500 V with between output and ground 500 V with between outputs

Environment

Standards	UL 508 CSA C22.2 No 60950-1 EN/IEC 62368-1
Product certifications	CSA 22-2 No 950 EAC RCM KC UL
Environmental characteristic	EMC conforming to EN 50081-1 EMC conforming to EN 50082-2 EMC conforming to EN 55024 Safety conforming to EN/IEC 60950
Operating altitude	6561.68 ft (2000 m)
IP degree of protection	IP20 conforming to IEC 60529
Ambient air temperature for operation	32...122 °F (0...50 °C) without derating mounting position A < 6561.68 ft (2000 m) 122...140 °F (50...60 °C) with derating factor mounting position A < 6561.68 ft (2000 m)

Ordering and shipping details

Category	US1CP1222525
Discount Schedule	CP12
GTIN	00785901616849
Returnability	No

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.61 in (4.1 cm)
Package 1 Width	5.43 in (13.8 cm)
Package 1 Length	5.79 in (14.7 cm)
Package weight(Lbs)	9.9 oz (280 g)

Contractual warranty

Warranty	18 months
-----------------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

Use Better

Materials and Substances

[EU RoHS Directive](#)

Pro-active compliance (Product out of EU RoHS legal scope)

SCIP Number

Fe64e454-324e-4d95-961c-5ccceb461cf0

California proposition 65

WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

PVC free

Yes

Use Again

Repack and remanufacture

[Circularity Profile](#)

[End of Life Information](#)

WEEE Label


 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings

Regulated Switch Mode Power Supply

Dimensions and Mounting


Mounting on a 35 mm/1.37 in. or 75 mm/2.95 in. Rail

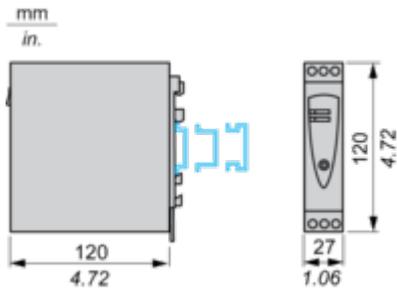

Connections and Schema

Regulated Switch Mode Power Supply


Internal Wiring Diagram



Regulated Switch Mode Power Supplies


Series or Parallel Connection

Series Connection

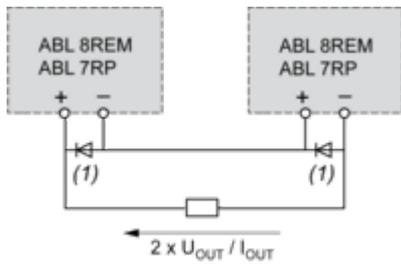

(1) Two Schottky diodes I_{min} = power supply I_n and V_{min} = 50 V

Parallel Connection

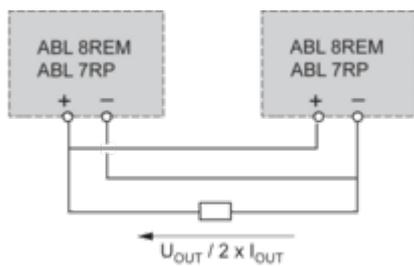

Family	Series	Parallel
ABL 8REM/7RP	2 products max.	2 products max.

NOTE: Series or parallel connection is only recommended for products with identical references.


Performance Curves

Regulated Switch Mode Power Supplies

Derating

The ambient temperature is a determining factor that limits the power an electronic power supply can deliver continuously. If the temperature around the electronic components is too high, their life will be significantly reduced. The nominal ambient temperature for the Optimum range of Phaseo power supplies is 50 °C. Above this temperature, derating is necessary up to a maximum temperature of 60 °C.

The graph below shows the power as a percentage of the nominal power that the power supply can deliver continuously, depending on the ambient temperature.

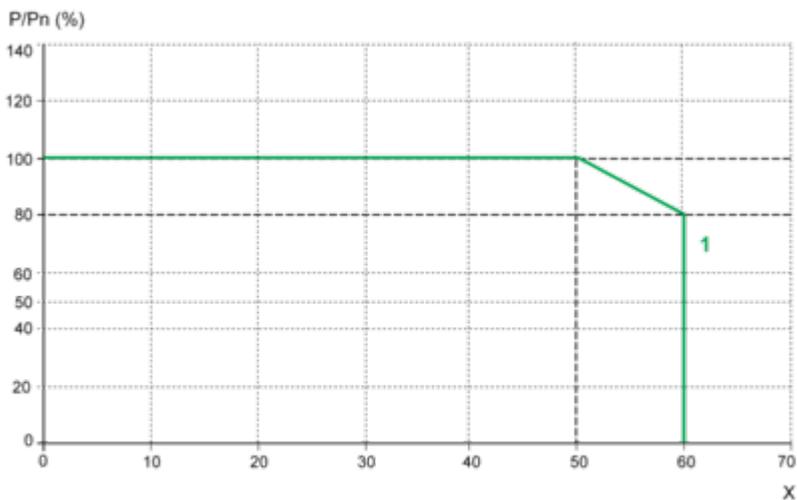

X Maximum operating temperature (°C)


(1) ABL 8REM, ABL 7RP mounted vertically

Derating should be considered in extreme operating conditions:

- Intensive operation (output current permanently close to the nominal current, combined with a high ambient temperature)
- Output voltage set above 24 Vdc (to compensate for line voltage drops, for example)
- Parallel connection to increase the total power

Regulated Switch Mode Power Supply

Load Limit

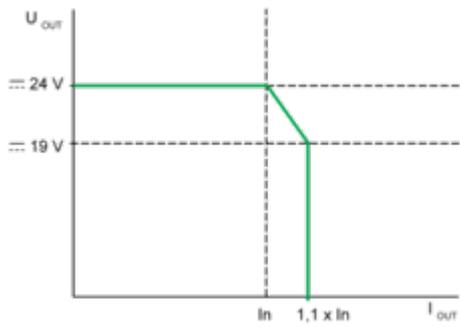

Regulated Switch Mode Power Supply

Temporary Overloads

