

Bently Nevada 81546-01

## XDCR I/O and Record Terminals / Dual Hermetic Relays Module



**\$125.00**

**In Stock**

**Qty Available: 5+**

**Used and in Excellent Condition**

**Open Web Page**

<https://www.artisanng.com/69572-45>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source  
for quality pre-owned  
equipment.

**Artisan Technology Group**

(217) 352-9330 | [sales@artisanng.com](mailto:sales@artisanng.com) | [artisanng.com](http://artisanng.com)

- Critical and expedited services
- In stock / Ready-to-ship
- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center


Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

# 3300/16 XY/GAP Dual Vibration Monitor

Bently Nevada™ Asset Condition Monitoring

## Description

The 3300/16 XY/Gap Dual Vibration Monitor continuously measures and monitors two independent channels of radial vibration, and average shaft position (gap), accepting inputs from two proximity probe/ Proximitor® systems. This monitor is designed to supersede the 3300/15 Dual Radial Vibration Monitor, which does not provide radial position gap alarms.

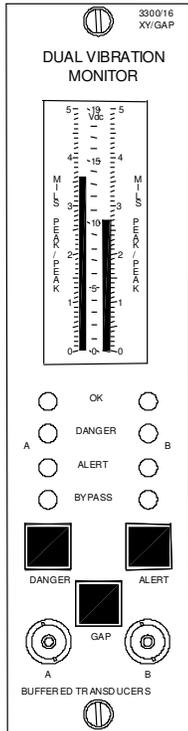

Specifications and Ordering Information  
Part Number 141498-01  
Rev. J(04/07)

---

## Specifications

### Signal Inputs

Accepts one or two proximity probe signals.

### Input Impedance:

10 k  $\Omega$ .

### Sensitivity:

100 mV/mil (4 V/mm) or  
200 mV/mil (8 V/mm) user-programmable.

---

### Power Consumption

2 watts (nominal)

---

### Signal Conditioning

#### Accuracy at +25° C (+77° F):

Within  $\pm 0.33\%$  of full-scale typical,

- $\pm 1\%$  maximum.
- $\pm 2\%$  maximum with 2X Trip Multiply
- $\pm 3\%$  maximum with 3X Trip Multiply

---

#### Frequency Response:

User-programmable for 4 to 4,000 Hz

(240 to 240,000 cpm), or

1 to 600 Hz (60 to 36,000 cpm); -3dB nominal.

**Note:** The 1 to 600 Hz (60 to 36,000 cpm) option is not recommended for machine applications with rapid startup and coastdown rates where acceleration /deceleration exceeds 1000 rpm/s. Because of the extended low frequency range to 60 cpm, the monitor circuitry will retain vibration transients normally experienced during fast startups (such as with motor driven equipment). This can hold vibration levels above alarm setpoints beyond alarm time delays. This may result in Danger relay actuation after the internal time delay has lapsed, even if

actual vibration has decreased below the Danger alarm setpoint level. If the standard 4 Hz (240 cpm) low frequency limit is not satisfactory for your application, contact your sales professional. The 1 Hz (60 cpm) option is recommended for applications where shaft rotative speed is less than 1,000 rpm.

---

### Recorder Outputs

User-programmable for +4 to +20 mA, 0 to -10 Vdc, or +1 to +5 Vdc. Voltage or current outputs are proportional to programmed monitor full-scale. Individual recorder outputs are provided for each channel. Monitor operation is unaffected by short circuits on recorder outputs.

#### Output Impedance (voltage outputs):

100  $\Omega$ . Minimum load resistance is 10 k  $\Omega$ .

#### Voltage Compliance (current outputs):

0 to +12 Vdc range across load. Load resistance is 0 to 600  $\Omega$  when using +4 to +20 mA option.

#### Recorder Accuracy (in addition to signal conditioning accuracy) at +25°C (+77°F):

- +4 to +20 mA:  $\pm 0.7\%$  of signal,  $\pm 0.09$  mA offset.
- +1 to +5 Vdc:  $\pm 1.1\%$  of signal,  $\pm 10$  mV offset.
- 0 to -10 Vdc:  $\pm 1.1\%$  of signal,  $\pm 15$  mV offset.

---

### Buffered Transducer Outputs

There is one coaxial connector per channel on the front panel and one terminal connection per channel on the rear panel. All are short circuit protected.

#### Output Impedance:

Specifications and Ordering Information  
Part Number 141498-01  
Rev. J(04/07)

100  $\Omega$ .

---

## Transducer Supply Voltage

User-programmable in Power Supply for -24 Vdc, or -18 Vdc, current limited on individual monitor circuit board.

**Note:** Contact your sales professional if 3000 series transducers are to be used in the monitoring system which also uses 3300 and/or 7200 series transducers.

---

## Alarm Setpoints

In addition to vibration Alert and Danger setpoints, gap Alert setpoints are available for both channels.

### Resolution:

Alarms are digitally adjustable from 0 to 100% of full-scale and can be set within LCD resolution ( $\pm 1.6\%$ ) to desired level.

### Repeatability:

Once set, alarms are repeatable within  $\pm 0.39\%$  of full-scale.

### Gap Alarm Time

#### Delay:

6 seconds.

---

## Relays

One alarm relay module can be installed behind each monitor. At least one relay module must be ordered with each 3300 System.

---

## Displays

Non-multiplexing vertical bargraph type Liquid Crystal Display (LCD). Individual 63 segment LCD per channel. Probe Gap indicated on a third, center scale. LCD also displays error codes and monitor ADJUST mode.

### Resolution:

Within  $\pm 1.6\%$  of monitor full-scale.

### Size:

83 mm (3.25 in), vertical dimension.

---

## LED Indicators

### OK:

One constant ON green LED per channel indicates OK condition of monitor, transducers, and field wiring. Constant OFF indicates NOT OK condition or Channel Bypassed (red Bypass LED will be ON). OK LED flashing at 1 Hz indicates channel has been NOT OK, but is now OK. OK LED flashing at 5 Hz indicates error code(s) stored in memory.

### Alarm:

Two red LEDs per channel indicate alarm status (individually for Alert and Danger). Flashing alarm LED indicates First Out (independent for Alert and Danger).

### Bypass:

Two red LEDs indicate the status of Danger Bypass and Rack/Channel Bypass functions (individually per channel). LEDs flash when monitor is in Trip Multiply mode.

---

## Environmental Limits

### Operating

#### Temperature:

0°C to +65°C (+32°F to +150°F).

### Storage

#### Temperature:

-40°C to +85°C (-40°F to +185°F).

### Relative

#### Humidity:

To 95%, non-condensing.

---

## CE Mark Directives

### EMC Directive

Certificate of Conformity: 158710

### Low Voltage

#### Directive

Certificate of Conformity: 135300

---

## Hazardous Area Approvals

### CSA/NRTL/C

Class I, Div 2  
Groups A, B, C, D  
T4 @ Ta = +65 °C

Certification  
Number

150368 – 1002151 (LR 26744)

### ATEX

 II 3 G  
EEx nC[L] IIC  
T4 @ Ta = -20°C to +60°C

When installed per document  
number 132577-01.

Certification  
Number

BN26744C-55A

---

## Physical

### Space

#### Requirements:

One rack position (any position  
except 1 and 2, which are  
reserved for Power Supply and  
System Monitor, respectively).

### Weight:

1 kg (2.2 lbs.).

---

## Ordering Information

For spares, order the complete catalog number as  
described below. This includes a front panel  
assembly, monitor PWAs with sheet metal, and  
appropriate relay module. This unit is optioned,  
tested and ready to install in your system. Spare  
relay modules can be ordered separately.

---

### XY/GAP Dual Vibration Monitor

3300/16-AXX-BXX-CXX-DXX-EXX-FXX

### Option Descriptions

**A:** Full-scale Range Option

**01** 0-3 mils peak-to-peak (pp)

**02** 0-5 mils pp  
**03** 0-10 mils pp  
**04** 0-15 mils pp  
**05** 0-20 mils pp  
**11** 0-100 µm pp  
**12** 0-150 µm pp  
**13** 0-200 µm pp  
**14** 0-400 µm pp  
**15** 0-500 µm pp

**B:** Transducer Input Option

**01** 3300 8 mm, 3300 XL 8mm or  
7200 5 mm and 8 mm  
Proximator Sensor, 200 mV/mil  
**02** 3000 Proximator Sensor, 200  
mV/mil (Transducer Output  
Voltage in power supply must  
be set for -18 Vdc or use a  
power converter.)  
**03** 7200 11 mm Proximator®  
Sensor(not XL), 100 mV/mil  
**04** 3300 XL 11 mm or 7200 14 mm  
or 3300 HTPS Proximator®  
Sensor, 100 mV/mil  
**05** 3300XL NSv and 3300 RAM  
Proximator® Sensor, 200  
mV/mil

**Note:** Contact your local office if 3000 series transducers are to be  
used in the monitoring system which also uses 3300 and/or 7200  
Series transducers.

**C:** Alarm Relay Option

**00** No Relays  
**01** Epoxy-sealed  
**02** Hermetically-sealed  
**03** Quad Relay (Epoxy-sealed  
only)  
**04** Spare Monitor – No SIM/SIRM

### Notes:

1. AND voting logic is not available with Quad Relays.
2. At least one relay module must be ordered with each  
3300 System. If one common relay module per system  
has been ordered, all monitors of this type must be  
jumper programmed at the factory to activate a relay  
bus. Order SCK (Special Configuration Kit) 157516-122  
& -123 for bus one or 157516-124 & -125 for bus two.
3. Agency approval places limitations on the relay  
module. Refer to the Relay Module data sheet for  
information.
4. Quad Relays are not available with the Internal Safety  
Barriers option.

**D:** Agency Approval Option

**00** Not required

---

Specifications and Ordering Information  
Part Number 141498-01  
Rev. J(04/07)

- 01 CSA/NRTL/C
- 02 ATEX self certification

**Note:** ATEX approval requires the monitor rack be installed in a weatherproof housing.

**E: Safety Barrier Option**

- 00 None
- 01 External
- 02 Internal

**Notes:**

1. External Safety Barriers must be ordered separately.
2. Quad Relays are not available with the Internal Safety Barriers option.

**F: Trip Multiply Option**

- 00 None
- 01 2X
- 02 3X

---

**Spare Relay Module Assemblies**

(Order the option in parenthesis for ATEX approved spares)

**81544-01(02)**

No Relays

**81545-01(02)**

Dual Epoxy Relays

**81546-01(02)**

Dual Hermetic Relays

**84152-01(02)**

Quad Relays

**88984-01(04)**

Dual Hermetic, Internal Barriers

**88984-02(05)**

Dual Epoxy, Internal Barriers

**88984-03(06)**

No Relay, Internal Barriers

---

**Field-programmable Options**

These options are field-programmable via plug-in jumpers. **Bold text** indicates options as shipped from the factory.

**First Out Option**

- Enabled**
- Disabled

**Alarm Time Delay Option**

- 0.1 second
- 1 second
- 3 seconds**
- 6 seconds

**Frequency Response Option**

- 240-240,000 rpm**
- 60-36,000 rpm

**Alert Reset Option**

- Latching**
- Nonlatching

**Danger Reset Option**

- Latching**
- Nonlatching

**Recorder Outputs Option**

- +4 to +20 mA**
- +1 to +5 Vdc
- 0 to -10 Vdc

**Recorder Clamping Mode (+4 to +20 mA option only)**

- Not OK = +2 mA**
- Not OK = +4 mA

**Danger Relay Voting Option**

- OR voting for relay drive**
- AND voting for relay drive

**Note:** For Quad Relays, AND voting logic must be done externally by wiring the contacts in series.

**Alert Relay Mode Option**

- Normally de-energized**
- Normally energized

---

Specifications and Ordering Information  
Part Number 141498-01  
Rev. J(04/07)

**Danger Relay  
Mode Option**

**Normally de-energized**

Normally energized

**Gap Alarms**

**Disabled**

Enabled

**Gap Full-scale  
Range**

- **-19 Vdc (All Transducers)**
- 15-0-15 mils (-01, -02 or -05 Transducer Input options).
- 25-0-25 mils (-01, -03 or -04 Transducer Input options).
- 50-0-50 mils (-03 or -04 Transducer Input options).
- 300-0-300  $\mu\text{m}$  (-01, -02 or -05 Transducer Input options).

- 600-0-600  $\mu\text{m}$  (-01, -03 or -04 Transducer Input options).
- 1000-0-1000  $\mu\text{m}$  (-03 or -04 Transducer Input options).

**Timed  
OK/Channel  
Defeat**

This function is always enabled on this monitor.

---

**Accessories**

**89634-01**

-24V to -18V Proximator® Power Converter

**128112**

Galvanic Isolator Kit

**02245002**


External Barrier

**02200214**

Surge Protector

# Field wiring diagram

3300/16 XY/GAP Dual Vibration Monitor

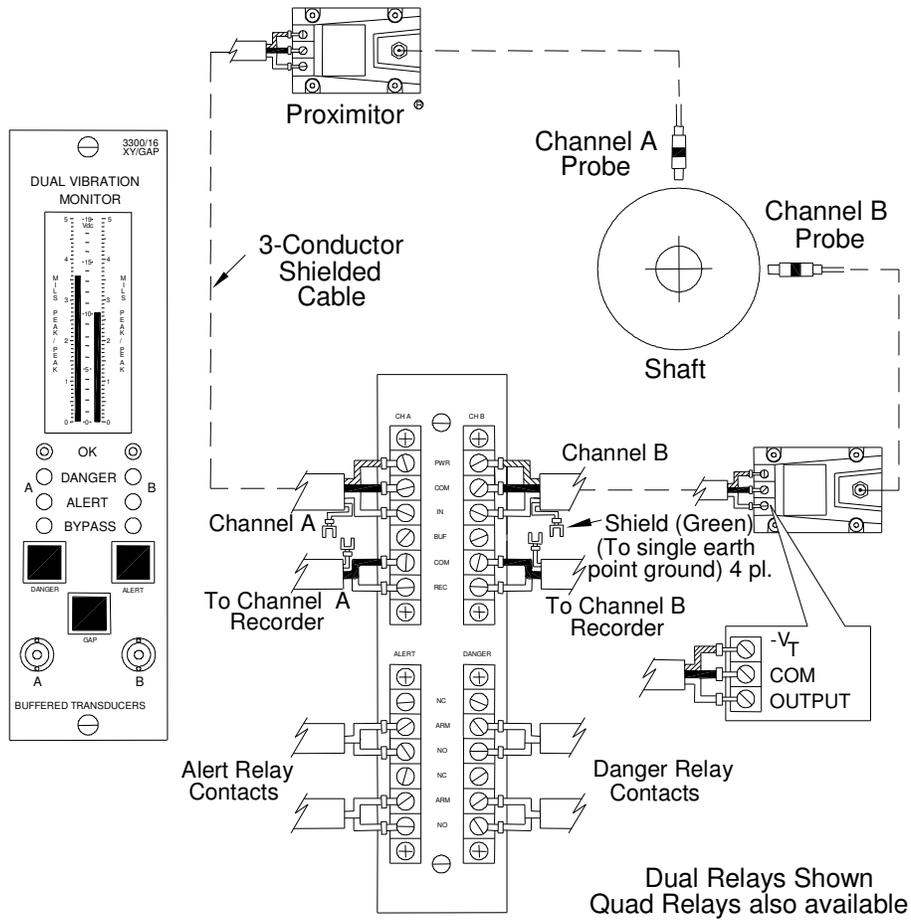

Field wiring diagram for 3300/16 XY/GAP Dual Vibration Monitor

Bently Nevada and Proximitor are trademarks of General Electric Company.

Copyright 1999. Bently Nevada LLC.  
1631 Bently Parkway South, Minden, Nevada USA 89423  
Phone: 775.782.3611 Fax: 775.215.2873

[www.ge-energy.com/bently](http://www.ge-energy.com/bently)

All rights reserved.

Specifications and Ordering Information  
Part Number 141498-01  
Rev. J(04/07)

Page 7 of 7

# Artisan Technology Group is an independent supplier of quality pre-owned equipment

## Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

## We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

## Learn more!

Visit us at [artisanng.com](http://artisanng.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | [sales@artisanng.com](mailto:sales@artisanng.com) | [artisanng.com](http://artisanng.com)

