

2500

MODEL



Unit Controller

Technical Specification

Ideal for:

- Remote I/O
- Alarm Monitoring
- Signal Conditioning
- Multi-loop PID
 - Single loop
 - Cascade control
 - Ratio control
 - Override control

Delivering key benefits:

- Seamless integration and communications with systems supervisory controllers
- Advanced PID control to deliver accurate control, independent of supervisory system scan time
- Physical distribution reduces wiring costs
- Local processing minimises communications to master
- Plug in modules that facilitate installation and maintenance and reduce downtime

High performance, high accuracy, high functionality in an I/O system that provides cost effective access to a wide range of advanced functions including PID control with auto tuning and gain scheduling.

Designed to communicate with Modbus RTU™, Profibus™, DeviceNet™ or Modbus TCP/IP masters, it can be used for signal conditioning, alarm monitoring, remote data acquisition or devolved control, for systems such as the Eurotherm Visual Supervisor, PC based SCADA packages and PLC's.

Eight PID blocks, provide an extensive range of control strategies. Each block offers one-shot auto tuning to optimise control performance without the need for specialist knowledge. Every PID block may be a Single PID, Cascade, Ratio or Override controller, each providing the choice of analogue, time proportioned or valve position output.

Six base sizes are available to take from 2 to 16 I/O modules each. Up to 16 bases may be daisy chained to provide acquisition and multiloop control solutions with up to 128 loops.

DIN rail mounting allows the 2500 to be located where the control action is required, minimising the cost of the cable used, as only the communications need be taken to the User Interface. The 2500 may also be mounted on part of the machine, saving the cost of centralised control cubicles.

A friendly Windows configurator package, 'iTools' is used to set up the 2500. 'iTools' parameterises and commissions the I/O points, the Toolkit and PID function blocks and interconnects the different variables, alarms, function blocks and I/O. 'Toolkit blocks' provide local combinational logic and mathematical calculation.



UNIT CONTROLLER

General

Sample rate	110mSec / Nominal 9Hz
Supply voltage range	18.0 to 28.8V dc, 30V dc damage may occur
VA requirements	< 80W max. for fully loaded rack
Non Replaceable Fuse Rating	4A time lag
IOC power consumption	Modbus 1.5W max Profibus 2W max Devicenet 2W max Ethernet (Modbus-TCP) 2W max
I/O Module power consumption	See module specification below

EMC

Emissions	EN50081-2: 1994
Immunity	EN50082-2: 1992
Vibration	EN60068-2, test FC

Safety

Safety	EN61010-1: 1993/A2: 1995 Installation cat II, Pollution degree 2
Safety earth and screen connections	Are made to clearly marked earth terminals at the bottom of the base

Environmental

Operating Temperature	0 to 55°C
Storage Temperature	-20 to 70°C
Relative Humidity	5 to 95 % non-condensing

2500B – Base Unit

The base consists of an aluminium extrusion, the internal I/O bus and mounting supports. The base is designed to be DIN rail mounted, within an enclosure. If preferred, however, it can be directly fixed to a bulkhead or mounting plate. Both base and modules can be fixed horizontally or vertically.

Bases are available in several standard sizes to suit the number of modules required in a particular system. The dimensions and weights of the different size bases are detailed in table below.

Mechanical

Module capacity	0	2	4	8	10	12	16
Width (mm)	47	87	137	239	289	340	442
Weight Kg (No modules)	0.1	0.25	0.35	0.65	0.7	0.9	1.2
Weight Kg (all modules)	0.25	0.5	1.0	1.9	2.25	2.7	3.6

Mounting	DIN rail or Bulkhead, can be mounted horizontally or vertically
DIN rail	Use symmetrical DIN rail to EN50022-35 X 7.5 or 35 X 15
Casing	With out additional protection IP20
Ventilation Space	25mm free space above and below

Module

I/O Module sample rate

IOC type	Analog Input and Output	Digital Input and Output
2500E	110mSec / Nominal 9Hz	110mSec / Nominal 9Hz
2500E SYSIO	55mSec / Nominal 18Hz	55mSec / Nominal 18Hz

Diagnostic LEDs

Diagnostic LED's indicate module diagnostic status.	
All modules	A green LED at the top indicates the module is powered and
2500C controller module	3 Yellow LED's show configuration or standby status, and communications activity. A red LED indicates failure of the internal self-diagnostic routines.
2500M Analogue module	Have red LED's for each channel to indicate channel failure
2500M Digital module	Have Yellow LED's for each channel to indicate the channel state.

Live plug-in

Live plug-in feature means that I/O modules can be replaced under power without any disturbance to the field wiring or other inputs and outputs, reducing downtime and minimising disturbance to other signal conditioning strategies.

Termination assemblies

The I/O modules are mounted on the base using terminal assemblies. Terminal assemblies provide the interface between the input and output signals and the I/O modules. Terminal assemblies and I/O modules are keyed to inhibit insertion of the incorrect module; this prevents damage to both equipment and plant.

Test Disconnect / Fuse Units

Terminal assemblies have an optional fuse or a link (isolator or disconnect). This provides a series of connections between the customer terminals and the I/O module, permitting pluggable fuse or link units to be placed in series with the signal. Fuse and link units are not interchangeable. Terminal assemblies that do not have "disconnect", have a dummy cover in the same position, providing space for a label to indicate the circuit or cable tag name.

Communications

'iTools' is used to set up the type, range linearisation and scaling of analogue inputs, the PID control type and parameters and all other functions and features within the 2500.

Soft wiring


Available on all 2500's, soft wiring enables interconnection between inputs, Alarms, Maths and Logic 'Toolkit Blocks', PID and Outputs, in fact it links the control application.


Saving and documenting your configuration

Once the configuration has been completed the application can be saved as a 'clone' file for repeat application. Clone files can be loaded, copied, saved and edited both on and off line.

For additional information on iTools please ask for data Sheet HA026177.

MECHANICAL INSTALLATION

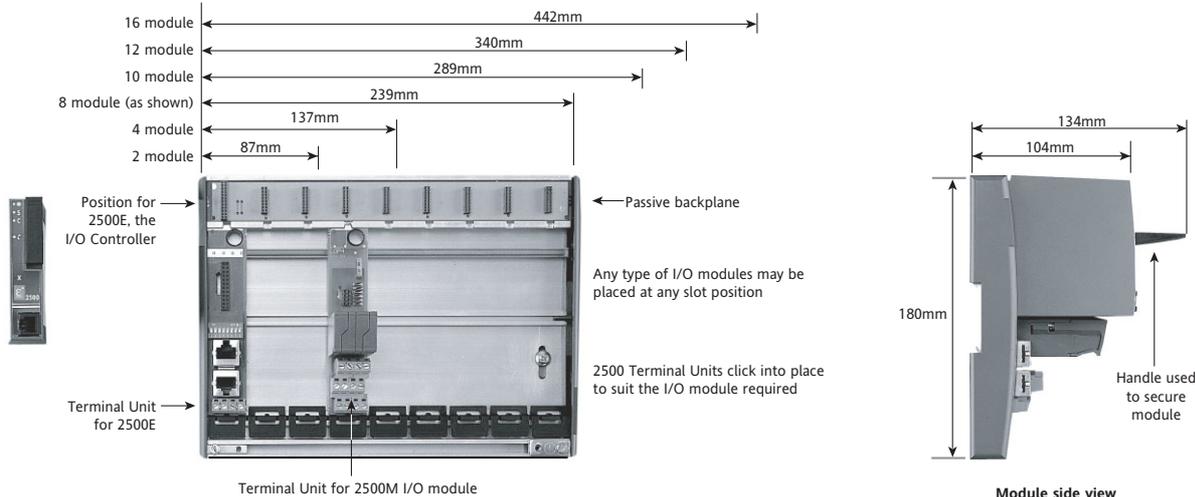

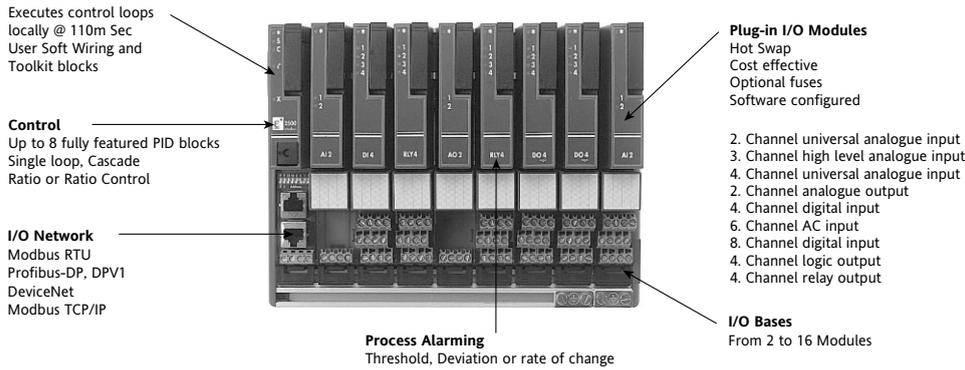

2500E – Control module for a base unit

The Input Output Controller (IOC) is the Central Processing Unit of the 2500 DIN rail controller. Each 2500 base has an IOC module mounted in the extreme left-hand position. The control module communicates with its I/O modules which are connected to an internal IO bus, via a passive Module Interconnection printed circuit board. This also provides the internal power required by the I/O modules.




Control Blocks

Control Loops	Up to 8 control blocks
Control modes	On/Off, single PID, Cascaded PID, Ratio Control or Override Control
Control outputs	Analogue, Time Proportioned or Motorised Valve control with or without feedback potentiometer
Cooling algorithms	Linear, Water, Fan, Oil
Tuning	One-shot Auto tune or Manual.
Number of PID sets	Three
Auto/Manual control	Bumpless transfer or forced manual O/P available
Setpoint rate limit	Ramp in units per sec, per min or per hour

Control

PID and User Alarms

All Analogue inputs and outputs share a common, comprehensive alarm capability in addition to the I/O alarms.

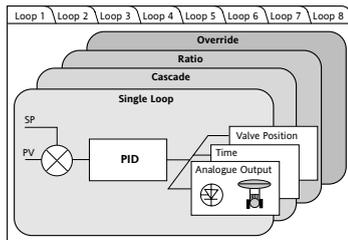

Number of user alarms	4 per PID block plus 4 additional user alarms
Alarm types	High absolute, Low absolute, Deviation high, Deviation low, Deviation band, Rate of change All with separate hysteresis
Alarm modes	Latching or non-latching. Blocking. Energised or de-energised in alarm

2500 Remote I/O (Modbus, DeviceNet or Profibus)

The modularity of the 2500 makes it easier to create I/O blocks with just the correct mix of Inputs and Outputs, enabling you to distribute the acquisition equipment geographically saving the cost of expensive multi-core or compensation cables. Up to sixteen 2500 base units may be daisy chained, to provide complex distributed multiloop control or acquisition applications. These are easily linked to an operator interface unit, SCADA package or supervisory PLC. They can also share the communications bus with other external devices such as discrete controllers, indicators, chart recorders, drives.

2500 Intelligent Alarm Monitor

Alarm Outputs (contact trips) may be triggered, based on sensed or calculated values. Calculated values can be derived from a comprehensive library of maths and Boolean functions. Alarms can be triggered upon violation of high or low threshold, deviation from a constant or sensed input and from calculated values. Rates of change alarms are also available.

Toolkit block

'Toolkit blocks' provide the mathematical or logical expressions required in creating an application. The functions are wired together using 'drag and drop' techniques simplifying creating complex application. The Toolkit block variables are parameterised using pull down lists or by direct data entry

User variables	16 real values per base:
Analogue function blocks	32 function blocks per base Add, Subtract, Multiply, Divide, Absolute difference, Maximum, Minimum, Hot swap, Sample and hold, Power, Square root, Log, Ln, Exponential, Select Logic
Digital function blocks	32 function blocks per base: AND, OR, XOR, Latch, Equal, Not equal, Greater than, Less than, greater than or equal to, less than or equal to.
Timing functions	8 Timers 8 Totalisers 8 Counters


2500 Signal Conditioning

The 2500 signal conditioning "solution provider" for multiple signal inputs offers the answer to complex signal conditioning challenges. The different base sizes and I/O structure enables users to match I/O modules to suit the precise needs of individual applications. Used as a signal-conditioning unit the 2500 can be configured to solve complex signal conditioning problems. It enables easy link access to analogue and digital inputs and outputs while still offering high speed industrial standard serial communication, to suit your data acquisition requirements.

- Custom linearisation
- Signal conditioning
- Ramp function
- High Low signal select
- First Order Filter
- Combinational Logic
- Mathematical functions

Humidity Function Block


A special Humidity function block calculates the relative humidity or dew point (Process Value) using the wet and dry bulb measurement technique. Pressure compensation can be measured via a transmitter and soft wired to the block from an input or can be set as a fixed parameter.

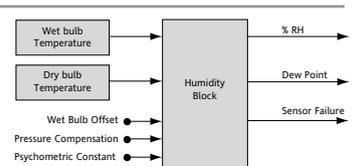

Zirconia Function Block

This feature is used to measure carbon potential, furnace dew point or oxygen concentration.

- Temperature Control
- Carbon Potential Control
- Sooting Alarm
- Automatic Probe Cleaning
- Endothermic Gas Correction

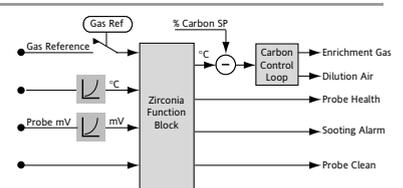

Supported probes: Probe mV, Bosch Carbon, AACC, Drayton, Accucarb, SSI, MacDhui, Oxygen, Log Oxygen, Bosch, Dewpoint.

Communications

The IOC module optionally supports Modbus RTU, DeviceNet, Profibus or Moobus TCP/IP communications.

Modbus RTU	3-wire RS232, RJ11 (Normally used for configuration)
Modbus RTU	Jumper selectable 2 or 4-wire RS485 (Field comms/configuration) Connectors 2 x RJ45
Profibus DP	High speed RS485. Up to 12Mb/s Connectors 9 pin D connector or 2 x RJ45
DeviceNet	Can - 500Kb "Open" connector
Modbus TCP/IP	10baseT, RJ45

ANALOGUE INPUT MODULE



2500M/AI2 - Two channel analogue input

This analogue input module is used to monitor analogue signals from a wide range of plant sensors. The mA and TC inputs each require the appropriate Terminal Unit.

The second channel of the AI2 has a special high impedance range for use with zirconia probe inputs.

No of channels	2
Input types	TC, RTD, Volts, mA, mV, Potentiometer, Pyrometer, Zirconia probe
mV range	-150mV to +150mV at input impedance >100MΩ
mA range	-22mA to +22mA with 5Ω burden in the Terminal Unit
Volts range	-10.2V to +10.2V at input impedance 303kΩ
RTD support	Support for 2, 3 and 4 wire resistance thermometer devices
Ohms range	0 to 600Ω 3- or 4-wire lead compensation
Hi Ohms range	0 to 5kΩ 3- or 4-wire lead compensation
Pot range	5% to 95% 'rotation' of 100Ω to 5kΩ pot
Resolution	Better than 0.001% of range
Linearity	Better than 0.003% of range
Input filtering	OFF to 999.9 seconds
Input accuracy	Electrical input factory calibrated to better than 0.1% of reading
System isolation	Reinforced, 264V ac max
Channel isolation	Reinforced, 264V ac max between thermocouple channels
Functional	264V ac max between RTD, volts and mA
Series Mode Rejection	60dB (50Hz to 60Hz, 1mA rms)
Common Mode Rejection	120dB (50Hz to 5kHz, 50V rms)
Current consumption	100mA max

TC Input specification

Linearisation types	J, K, L, R, B, N, T, S, C, PL2, PT100, Linear, SqRoot, plus custom
CJC System	Measured by RTD fitted on Terminal Unit
CJC Accuracy	±0.5°C, over -10°C to +70°C
CJC Rejection	Better than 30:1
Initial accuracy	±1°C or ±0.2% of reading whichever is greater (standard thermocouples)

Note:

User Calibration options can improve performance, limited only by noise and non-linearity.

AI2 – ORDER CODE

Module	2500M/AI2UNIV	Two Channel – isolated universal input
Terminal Unit	2550T/AI2/TC/NONE	Terminal unit for TC with CJC
	2550T/AI2/DC/NONE	Terminal unit for Mv, V, PT100, Hiz inputs
	2550T/AI2/DC/SHUNT	Terminal unit for 5 ohm shunt fitted for mA



2500M/AI3 - Three channel analogue input

Provides three isolated current input channels specifically designed to meet the requirements of modern two wire transmitters. Each channel has its own isolated 24V supply for 3-wire transmitter excitation.

Each channel is protected against short circuit (with 24V dc supply on) and utilises a sophisticated trip and try system where the module senses over current and cuts the power, after a period the circuit checks for continued circuit malfunction.

The module can be optionally fitted with disconnects to allow isolation of an individual input to allow work on the loop to continue safely.

No of channels	3
Input range	-28mA to +28mA
Resolution	Better than 1uA (16 bits with 1.6 second filter time)
Linearity	Better than 10uA
Initial accuracy	Factory calibrated to better than ±0.1% of reading
Input filtering	OFF to 999.9 seconds
Burden resistance	100Ω nom, 50mA max current
Channel PSU	22 to 25V dc, current limited 30mA nom, self-resetting
System isolation	Reinforced, 264V ac max
Channel isolation	Functional, 50V ac max
Current consumption	100mA max


Notes

- User Calibration options can improve performance, limited only by noise and non-linearity.
- Total burden can be increased to 250ohm. for HART by cutting a link track on the Terminal Unit.

AI3 – ORDER CODE

Module	2500M/AI3UNIV	Three channel – isolated 4-20mA analogue input with isolated 24V Tx PSU
Terminal Unit	2500T/AI3/UNIV/NONE	Terminal unit with dummy cover fitted
	2550T/AI3/UNIV/DCONNECT	Terminal unit with disconnect

ANALOGUE OUTPUT MODULE

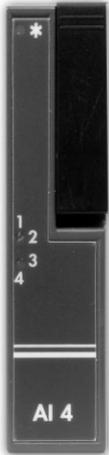

2500M/AI4 - Four channel analogue input

This analogue input module is used to monitor analogue signals from a wide range of plant sensors. The mA and TC inputs each require the appropriate Terminal Unit.

No of channels	4
Input types	TC, mV, mA, Pyrometer
mV range	-150mV to +150mV at input impedance >100MΩ
mA range	-22mA to +22mA with 5Ω burden in the Terminal Unit
Resolution	Better than 0.001% of range
Input filtering	OFF to 999.9 seconds
Initial input accuracy	Electrical Input Factory Calibrated to better than 0.1% of reading
System Isolation	Reinforced, 264V ac max
Channel isolation	Functional, 264V ac max separating Ch1 and Ch2 from Ch3 and Ch4
Series Mode Rejection.	60dB (50Hz to 60Hz, 1mA r.m.s)
Common Mode Rejection	120dB (50Hz to 5kHz, 50V r.m.s)
Current consumption	100mA max

TC Input specification

Linearisation types	J, K, L, R, B, N, T, S, C, PL2, linear, SqRoot, plus custom
CJC System	Measured by RTD fitted on Terminal Unit
CJC Accuracy	±0.5°C, over -10°C to +70°C
CJC Rejection	Better than 30:1
Initial accuracy	±1°C or ±0.2% of reading whichever is greater (standard thermocouples)

Note:

1. User Calibration options can improve performance, limited only by noise and non-linearity.
2. Wiring care and sensor choice should be used to prevent ground loops when using non-isolated TC's.



2500M/AO2 - Two channel analogue output

This analogue output module provides two isolated analogue output channels. Each output may be independently configured for current or voltage mode.

The module can be optionally fitted with disconnects to allow isolation of an individual output to allow work on the individual loop to continue safely

No of channels	2
Current output	-0.1 to 20.5mA; 10V dc max compliance with total burden less than 500Ω
Voltage output	0 to 10V dc; 20mA max compliance with total load greater than 500 ohms -0.5 to 10.5 V dc; 20mA max compliance with total load greater than 1500Ω
Resolution	Better than 1 part in 10,000 (15 bit typical)
System isolation	Reinforced, 264V ac
Channel isolation	Functional, 264V ac max
Current consumption	120mA max

AI4 – ORDER CODE

Module	2500M/AI4UNIV	Four channel – T/C, mV, mA input
Terminal Unit	2500T/AI4/TC/NONE	Terminal unit for 4 channel TC with CJC
	2550T/AI4/mV/NONE	Terminal unit for 4 channel mV
	2550T/AI4/mA/NONE	Terminal unit for 4 channel mA

AO2 – ORDER CODE

Module	2500M/AO2UNIV	Two channel isolated mA, volts
Terminal Unit	2500T/AO2/UNIV/NONE	Terminal unit
	2550T/AO2/DCONNECT	Terminal unit with disconnect

DIGITAL INPUT MODULE



2500M/DI4 - Four channel digital input

This digital input module accepts four logic inputs, and may be wired either for voltage input (either polarity) or for contact closure.

No of channels	4
Input functions	On/Off, pulse and de-bounce
System isolation	Reinforced, 264V ac
Channel isolation	Channels share a common connection
Current consumption	100mA max

Contact' Variant

External supply	18-30V dc wetting power required
Contact closure	ON state: Input resistance threshold 100Ω (<1kΩ typical) OFF state: Input resistance threshold 10kΩ (>7kΩ typical)
Wetting current	>8mA
Wetting voltage	>9V, 12V typical measured open-circuit

Logic' Variant

Logic inputs	ON state: Input voltage threshold 10.8V dc, 30V max OFF state: Input voltage threshold 5.0V dc non-overlapping
Input impedance	4kΩ approx (at least 2mA drive required for 'ON')

AI4 - ORDER CODE

Module	
2500M/DI424V/EXTPWR	Two channel – input
Terminal Unit	
2550T/DI4/UNIV/NONE	Terminal unit with dummy cover fitted
2550T/DI4/UNIV/DCONNECT	Terminal unit with disconnects

2500M/DI8 - Eight channel logic input

This eight channel digital input module accepts eight logic inputs and is available in two factory option formats for voltage or contact-closure input.

No of channels	8
Input functions	On/Off, pulse and de-bounce inputs with input invert
System isolation	Reinforced, 264V ac max
Channel isolation	50V ac functional isolation between 4 pairs of channels
Current consumption	100mA max

'Contact' Variant

Contact closure	ON state: Input resistance threshold 100Ω (<1kΩ typical) OFF state: Input resistance threshold 10kΩ (>7kΩ typical)
Wetting current	4mA typical
Wetting voltage	>9V, 12V typical, measured open-circuit

'Logic' Variant

Logic inputs	ON state: Input Voltage threshold 10.8V dc, 30V max OFF state: Input Voltage threshold 5.0V dc non-overlapping
Input impedance	5kΩ approx (>2mA drive required for 'ON')

AI8 - ORDER CODE

Module	
2500M/DI8logic/NONE	Eight channel – non isolated Logic
2500M/DI8contact/NONE	Eight channel – non isolated Connect
Terminal Unit	
2550T/DI8/UNIV/NONE	Terminal unit
2550T/DI8/UNIV/DCONNECT	Terminal unit with disconnects

2500M/DI6 - Six channel AC voltage input


The six channel digital input module accepts AC voltage inputs and is available in two factory options optimized for 115V ac or 230V ac ranges.

No of channels	6
Input functions	On/Off or de-bounce
Frequency	47Hz-63Hz
Transient immunity	EN50082
System isolation	Reinforced, 264V ac max
Channel isolation	Functional, 264V ac max
Current consumption	100mA max

115V ac' Variant

Active ON state	>95V ac rms, 132V ac rms max
Inactive OFF state	<30V ac rms
Main input current	More than 2mA required for 'ON'
Max input current	8mA


V-I curve for 115V ac operation

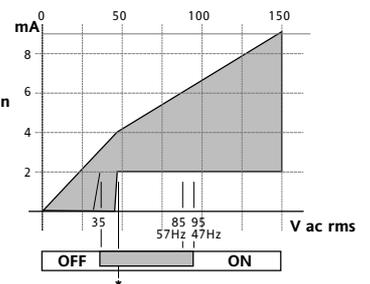

230V ac' Variant

Active ON state	>180V ac rms, 264V ac rms max
Inactive OFF state	<60V ac rms
Min input current	More than 2mA required for 'ON'
Max input current	8mA

V-I curve for 230V ac operation

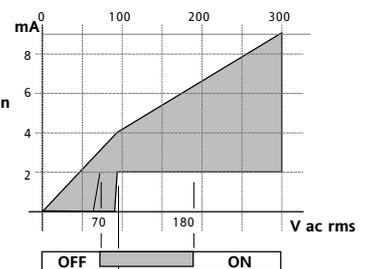

INADVERTENT USE OF THE WRONG RANGE

*115V type on 230V ac
No damage will result.*

Power dissipation will be higher than desirable for continued use on all 6 channels simultaneously.

THIS IS NOT A RECOMMENDED MODE OF OPERATION

* The threshold may be between Vmaxoff and Vminloff is defined at the threshold

AI6 - ORDER CODE

Module	
2500M/DI6HVAC/230V	Six channel high voltage 230 volt ac logic
2500M/DI6HVAC/115V	Six channel high voltage 115 volt ac logic
Terminal Unit	
2500T/DI6/UNIV	Terminal unit

DIGITAL OUTPUT MODULE



2500M/DO4 - Four channel logic output

This digital output module provides four logic outputs and is available in two factory option formats for standard or high-current output.

No of channels	4
System isolation	Reinforced, 264V ac max
Channel isolation	Channels share a common connection
Current consumption	100mA max
Output functions	TPO and VP in module
'Logic' Variant	
Voltage supply	18 <Vs <30V dc
Output current	>8mA high drive per channel (Current limited)
Output Voltage	At least Voltage supply (Vs) -3V switch drop
24' Variant	
External supply	12 <Vs <30V dc
Output current	100mA maximum high drive per channel (Current & Temperature limited)
Output Voltage	At least Voltage supply (Vs) -3V switch drop



2500M/RLY4 - Four channel relay output

This digital output module provides four relay outputs. The relay contacts are all fitted with removable snubber circuits to reduce contact arcing and prolong contact life.


No of channels	4 (3 normally open + 1 changeover)
Max current rating	2A at up to 240V ac; 0.5A at 200V dc, increasing to 2A at 50V dc (resistive)
Min ratings	AgCdO contacts offer best operating life switching more than 100mA 12V
Fuse	3.15A, 20mm ceramic, time lag (T)
System isolation	Reinforced, 264V ac max
Channel insulation	Functional, 264V ac max
Contact life	>10million operations @ 250V ac, 1A rms
De-rating	>600,000 operations @ 250V ac, 2A rms
	The above ratings summarise the performance with resistive loads. With complex loads further derating may be required

AC Voltage

As the AC load becomes more "difficult" a more significant de-rating factor is required. The graph opposite shows the de-rating to be applied in terms of contact life, assuming the load requirement is pre-defined.

F1 Worst case
F2 Typical

Reduction factor for inductive ac loads

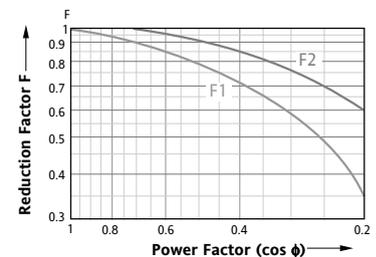


Contact life = resistive contact life x reduction factor

DC voltage

DC operation is also limited for difficult loads, particularly where there is significant inductance. Here the working current must be limited as shown, where the load time-constant (L/R, in ms) is the significant factor.

Max dc load breaking capacity

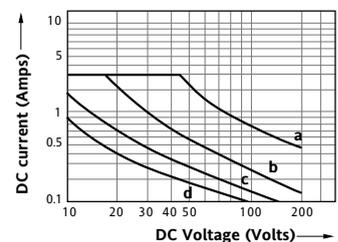

a = resistive b = 20ms c = 40ms d = 60ms

DO4 – ORDER CODE

Module	
2500M/DO4LOGIC/EXTPWR	Four channel digital logic output 10mA max
2500M/DO424V/EXTPWR	Four channel digital 24d switched output
Terminal Unit	
2500T/DO4/UNIV/NONE	Terminal unit with dummy cover fitted
2500T/DO4/UNIV/DCONNECT	Terminal unit with disconnects

RLY4 – ORDER CODE

Module	
2500M/RLY4	Four channel isolated relay output
Terminal Unit	
2500T/RLY4/NOFUSE	Terminal unit
2500T/RLY4/FUSE2A	Terminal unit with four 3.15a fuses

ORDER CODE

2500

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

2 Base Size	
2 module positions	S02
4 module positions	S04
8 module positions	S08
10 module positions	S10
12 module positions	S12
16 module positions	S16
3 Earthing System	
Two earth clamps fitted	NONE
Earthing Clamp for a 2 I/O module base	C02
Earthing Clamp for a 4 I/O module base	C04
Earthing Clamp for a 8 I/O module base	C08
Earthing Clamp for a 10 I/O module base	C10
Earthing Clamp for a 12 I/O module base	C12
Earthing Clamp for a 16 I/O module base	C16
4 Function	
Remote IO acquisition	ACQIO
* Remote IO acquisition (55ms)	SYSIO
Toolkit block + acquisition functions	UW
Four PID blocks + acquisition	4LOOP
Four PID + acquisition	4LOOPUW
Eight PID blocks + acquisition	8LOOP
Eight PID blocks + Toolkit and acquisition	8LOOPUW
5 Comms Protocol	
No extension memory fitted	MODBUS
DeviceNet comms	DEVICENET
Profibus comms	PROFIBUS
Profibus DPV1 comms	PBUS DPV1
Modbus TCP/Ethernet	ENET MBUS
6 Comms Connector Type	
RJ45 connector for Modbus or Profibus	RJ45
9 pin D connector for Profibus	9DTYPE
Standard DeviceNet screw connector	DN
Ethernet communications	EN

7 Application	
No application loaded	NONE
Pre-configured application loaded	YYYYXX
8-24 Module and Terminations	
2 channel isolated universal analogue input with CJC	A12-TC
2 channel isolated universal analogue input with PT100, HiZ and Volts	A12-DC
2 channel isolated universal analogue input with -50ohm shunt fitted for mA	A12-MA
3 channel isolated 4-20mA analogue input with 24V dc TX PSU	A13
3 channel isolated 4-20mA analogue input with 24V dc TX PSU - disconnects	A13-DT
4 channel non isolated universal T/C, with CJC	A14-TC
4 channel non isolated mV input	A14-MV
4 channel non isolated mA input	A14-MA
2 channel isolated universal analogue output mA, volts	AO2
2 channel isolated analogue output mA, volts with disconnects	AO2-DT
4 channel 24V dc digital input	DI424
4 channel 24V dc digital input with disconnects	DI424-DT
6 channel 230V ac logic input	DI6-230V
6 channel 115V ac logic input	DI6-115V
8 channel non isolated digital input (logic inputs only)	DI8L
8 channel non isolated digital input (contact inputs only)	DI8C
4 channel 24V dc digital output, logic output 10mA max	DO4L
4 channel 24V dc digital output, logic output 10mA max with disconnects	DO4L-DT
4 channel digital output 24V dc switched output	DO424
4 channel digital output 24V dc switched output with disconnects	DO424-DT
4 channel relay output module	RLY4
4 channel relay output module with disconnects	RLY4-FUSE
Blank terminal unit	BLANK
No terminal unit or blank fitted	NONE
25 Configuration Tools	
CD with manuals and latest version of iTools - No iTools product key	NONE
CD with Manuals, iTools and STD iTools product key and 2500 configuration lead	ITOOLS
Shipped without CD	NOCD
Notes:	
* SYSIO only available with field 5 Profibus or PBUS DPV	
Field 7 Y = Alphanumeric character X = Numeric character	

Eurotherm: International sales and service

Understanding and providing local support is a key part of Eurotherm's business. Complementing worldwide Eurotherm offices are a whole range of partners and a comprehensive technical support team... a soothing melody to ensure you get a service you will want to go back to.

AUSTRALIA Sydney
Eurotherm Pty. Ltd.
Telephone (+61 2) 9838 0099
Fax (+61 2) 9838 9288
E-mail info@eurotherm.com.au

AUSTRIA Vienna
Eurotherm GmbH
Telephone (+43 1) 7987601
Fax (+43 1) 7987605
E-mail eurotherm@eurotherm.at

BELGIUM & LUXEMBURG Huy
Eurotherm S.A./N.V.
Telephone (+32) 85 274080
Fax (+32) 85 274081
E-mail sales@eurotherm-belgium.be

BRAZIL Campinas-SP
Eurotherm Ltda.
Telephone (+5519) 3707 5333
Fax (+5519) 3707 5345
E-mail eurothermltda@eurothermltda.com.br

DENMARK Copenhagen
Eurotherm Danmark A/S
Telephone (+45 70) 234670
Fax (+45 70) 234660
E-mail info@eurotherm.se

FINLAND Abo
Eurotherm Finland
Telephone (+358) 22506030
Fax (+358) 22503201

FRANCE Lyon
Eurotherm Automation SA
Telephone (+33 478) 664500
Fax (+33 478) 352490
E-mail ea@automation.eurotherm.co.uk

GERMANY Limburg
Eurotherm Deutschland GmbH
Telephone (+49 6431) 2980
Fax (+49 6431) 298119
E-mail info@regler.eurotherm.co.uk

HONG KONG & CHINA
Eurotherm Limited Aberdeen
Telephone (+85 2) 28733826
Fax (+85 2) 28700148
E-mail eurotherm@eurotherm.com.hk

Guangzhou Office
Telephone (+86 20) 8755 5936
Fax (+86 20) 8755 5831

Beijing Office
Telephone (+86 10) 6762 0936
Fax (+86 10) 6762 0931

Shanghai Office
Telephone (+86 21) 6352 6406
Fax (+86 21) 6352 7351

INDIA Chennai
Eurotherm India Limited
Telephone (+91 44) 24961129
Fax (+91 44) 24961831
E-mail sales@eurothermdel.com

IRELAND Dublin
Eurotherm Ireland Limited
Telephone (+353 1) 469180
Fax (+353 01) 4691300
E-mail info@eurotherm.ie

ITALY Como
Eurotherm S.r.l.
Telephone (+39 31) 975111
Fax (+39 31) 977512
Telex 380893 EUROTH I
E-mail info@eurotherm.it

KOREA Seoul
Eurotherm Korea Limited
Telephone (+82 31) 2738507
Fax (+82 31) 2738508
E-mail help@eurotherm.co.kr

NETHERLANDS Alphen a/d Ryn
Eurotherm B.V.
Telephone (+31 172) 411752
Fax (+31 172) 417260
E-mail sales@eurotherm.nl

NORWAY Oslo
Eurotherm A/S
Telephone Oslo (+47 67) 592170
Fax (+47 67) 118301
E-mail info@eurotherm.se

SPAIN Madrid
Eurotherm España SA
Telephone (+34 91) 6616001
Fax (+34 91) 6619093
E-mail ventas@iberica.eurotherm.co.uk

SWEDEN Malmo
Eurotherm AB
Telephone (+46 40) 384500
Fax (+46 40) 384545
E-mail info@eurotherm.se

SWITZERLAND Freienbach
Eurotherm Produkte (Schweiz) AG
Telephone (+41 55) 4154400
Fax (+41 55) 4154415
E-mail epsag@eurotherm.ch

UNITED KINGDOM Worthing
Eurotherm Limited
Telephone (+44 1903) 268500
Fax (+44 1903) 265982
E-mail info@eurotherm.co.uk
Web www.eurotherm.co.uk

U.S.A Leesburg VA
Eurotherm Inc.
Telephone (+1 703) 443 0000
Fax (+1 703) 669 1300
E-mail info@eurotherm.com
Web www.eurotherm.com

© Copyright Eurotherm Limited 2005

Invensys, Eurotherm, the Eurotherm logo and Wonderware are trademarks of Invensys plc, its subsidiaries and affiliates. All other brands may be trademarks of their respective owners.

All rights are strictly reserved. No part of this document may be reproduced, modified, or transmitted in any form by any means, nor may it be stored in a retrieval system other than for the purpose to act as an aid in operating the equipment to which the document relates, without the prior written permission of Eurotherm limited.

Eurotherm limited pursues a policy of continuous development and product improvement. The specifications in this document may therefore be changed without notice.

The information in this document is given in good faith, but is intended for guidance only. Eurotherm Limited will accept no responsibility for any losses arising from errors in this document.

