

## Spare Relay Assembly Module - Conformal Coated



**\$1350.00**

**In Stock**

**Qty Available: 5+**

**Used and in Excellent Condition**

**Open Web Page**

<https://www.artisantg.com/96182-2>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source  
for quality pre-owned  
equipment.

**Artisan Technology Group**


(217) 352-9330 | [sales@artisantg.com](mailto:sales@artisantg.com) | [artisantg.com](http://artisantg.com)

- Critical and expedited services
- In stock / Ready-to-ship
- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

# 3300/65 Dual Probe Monitor

Bently Nevada™ Asset Condition Monitoring

## Description

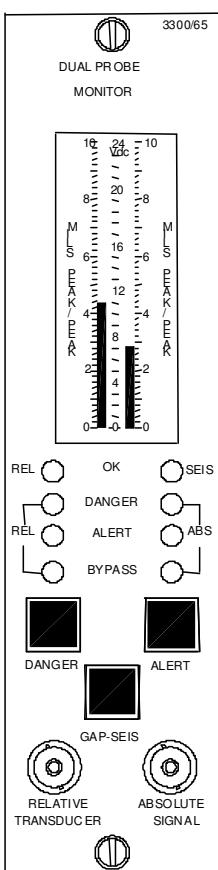

The 3300/65 Dual Probe Monitor combines the shaft relative displacement signal of a Bently Nevada proximity transducer and casing vibration from a velocity transducer, both of which are installed in the same axis on the machine, into one measurement of shaft absolute vibration.

Dual Probe Monitors are designed for machines with fluid film bearings, such as large steam and gas turbines, where a significant amount of shaft vibration is transmitted to the case. If you are uncertain as to whether your machine transmits significant vibration to the casing, we can provide engineering services to determine the characteristics of your machine and recommend an appropriate monitoring system.

Four distinct measurements are provided by the Dual Probe Monitor:

- Shaft relative vibration - A proximity probe measurement of shaft vibration relative to the bearing housing.
- Bearing housing vibration - A seismic measurement of the bearing housing vibration relative to free space.
- Shaft absolute vibration - A vector summation of shaft relative vibration and bearing housing vibration.
- Shaft average radial position relative to the bearing clearance - A proximity probe dc gap measurement.



imagination at work

Specifications and Ordering Information  
Part Number 141518-01  
Rev. H (05/07)

Page 1 of 7

## Specifications

### Inputs

#### Signal:

Accepts two signals, one from a 600 cpm 2-wire velocity Seismoprobe®, a Velomitor®, or Velomitor XA and one from a proximity transducer.

#### Input Impedance

#### Relative Transducer:

10 k  $\Omega$ .

#### Seismic Transducer:

(2-wire) 10 k  $\Omega$ .

#### Signal Scale Factor

#### Proximity Probe:

200 mV/mil (7.87 V/mm),

100 mV/mil (3.94 V/mm)

Jumper-selectable.

#### Seismic Input:

#### Seismoprobe:

500 mV/(in/s) (19.69 mV/(mm/s)).

#### Velomitor

100 mV/(in/s) (3.94 mV/(mm/s))

**Note:** The buffered output of the seismic signal is integrated velocity with the same output scale factor as the proximity signal.

#### Power Consumption:

Nominal consumption of 1.5 watts.

## Signal Conditioning

#### Accuracy:

Within  $\pm 0.33\%$  of full-scale typical,

$\pm 1\%$  maximum

$\pm 2\%$  maximum with 2X Trip Multiply.

$\pm 3\%$  maximum with 3X Trip Multiply.

Specified at ambient temperature of +25°C (+77°F).

#### Frequency response:

Nominal -3dB corners User-programmable for 4 to 4,000 Hz (240 to 240,000 cpm), or 1 to 600 Hz (60 to 36,000 cpm) for proximity transducer; 4 to 4,000 Hz (240 to 240,000 cpm) for Seismic; 10 to 4000 Hz (600 to 240,000 cpm) for Absolute.(or to 36,000 cpm if 1-600 Hz relative option selected)

**Note:** The 1 to 600 Hz (60 to 36,000 cpm) option is not recommended for machine applications with rapid startup and coastdown rates where acceleration/deceleration exceeds 1,000 rpm per second. Because of the extended low frequency range to 60 cpm, the monitor circuitry will retain vibration transients normally experienced during fast startups (such as with motor driven equipment). This can hold vibration levels above alarm setpoints beyond alarm time delays. This may result in Danger relay actuation after the internal time delay has lapsed even if actual vibration has decreased below the Danger alarm setpoint level. If, based on this explanation, the standard 4 Hz (240 cpm) low frequency limit is not satisfactory for your application, contact your sales professional. The 1 Hz (60 cpm) option is recommended for applications where shaft rotative speed is less than 1,000 rpm.

## Outputs

#### Recorder:

User-programmable for +4 mA to +20 mA, 0 Vdc to -10 Vdc, or +1 Vdc to +5 Vdc. Outputs are proportional to programmed full-scale range. Recorder outputs are provided for relative and absolute or relative and seismic readings. Monitor operation is unaffected by short-circuits on recorder outputs.

<b>Recorder accuracy (in addition to signal conditioning accuracy):</b>	All specified at +25°C (+77° F).  <b>+4 to +20 mA:</b> $\pm 0.7\%$ of signal, $\pm 0.09$ mA offset.  <b>+1 to +5 Vdc:</b> $\pm 2.2\%$ of signal, $\pm 10$ mV offset.  <b>0 to -10 Vdc:</b> $\pm 1.1\%$ of signal, $\pm 15$ mV offset.	<b>Alarms</b>  <b>Alarm Setpoints:</b>  Alarms (Alert, Danger, and Gap) are digitally adjustable from 0 to 100% of full-scale and can be set within LCD resolution ( $\pm 1.6\%$ of full-scale) to a desired level. Once set, alarms are repeatable within $\pm 0.4\%$ of full-scale.
<b>Output Impedance (voltage outputs):</b>	100 $\Omega$ . Minimum load resistance is 10 k $\Omega$ .	<b>Relay Modules</b>  <b>Location:</b>  One relay module can be installed behind each monitor. At least one alarm relay module must be ordered with each 3300 System.
<b>Voltage Compliance (current outputs):</b>	0 to +12 Vdc range across load. Load resistance is 0 to 600 $\Omega$ when using +4 to +20 mA option.	<b>Displays</b>  <b>Meter:</b>  Nonmultiplexing vertical bargraph type Liquid Crystal Display (LCD). 63 individual LCD segments per channel. Probe Gap indicated on a third, center scale. LCD also displays error codes and monitor ADJUST mode.
<b>Buffered Transducer Outputs:</b>	Two coaxial connectors on front panel provide relative and absolute signals. A test pin behind the front panel provides seismic signal. The three signals are also available on the rear panel. All signals are short-circuit protected.	<b>Resolution:</b>  Within $\pm 1.6\%$ of monitor full-scale.  <b>Size:</b>  83 mm (3.2 in), vertical dimension.
<b>Output Impedance:</b>	100 $\Omega$ .	<b>LED Indicators</b>  <b>OK:</b>  One constant ON green LED per channel to indicate OK condition of monitor, transducers, and field wiring. Constant OFF indicates NOT OK condition or channel Bypassed (red Bypass LED will be ON). OK LED flashing at 1 Hz indicates transducer has been NOT OK, but is now OK. OK LED flashing at 5 Hz indicates error code(s) stored in memory. One OK LED for relative transducer and one for seismic transducer.
<b>Transducer Supply Voltage:</b>	-24 Vdc. Voltages are current limited for each channel on the monitor circuit board.	

**Alarm:**

Two red LEDs per channel indicate alarm status (independent Alert and Danger LEDs for each channel). Flashing alarm LED indicates First Out (independent for Alert and Danger alarms).

**Bypass:**

Two red LEDs indicate status of Danger Bypass and Rack/Channel Bypass functions.

**Environmental Limits****Operating Temperature:**

0°C to +65°C (+32°F to +150°F).

**Storage Temperature:**

-40°C to +85°C (-40°F to +185°F).

**Relative Humidity:**

To 95%, noncondensing.

**CE Mark Directives****EMC Directive**

Certificate of Conformity: 158710

**Low Voltage Directive**

Certificate of Conformity: 135300

**Hazardous Area Approvals****CSA/NRTL/C**

Class I, Div 2

Groups A, B, C, D

T4 @ Ta = +65 °C

**Certification Number**

150368 – 1002151 (LR 26744)

**ATEX**

 II 3 G

EEx nC[L] IIC

T4 @ Ta = -20°C to +60°C

When installed per document number 132577-01.

**Certification Number**

BN26744C-55A

**Physical****Rack Space Requirements:**

First and second slot in rack are reserved for Power Supply and System Monitor, respectively. Monitor can be placed in any other available rack position.

**Weight:**

1 kg (2.2 lbs.).

**Ordering Information**

For spares, order the complete catalog number as described below. This includes a front panel assembly, monitor PWAs with sheet metal, and appropriate relay module. This unit is optioned, tested and ready to install in your system. Spare relay modules can be ordered separately.

**Dual Probe Monitor**

**3300/65-AXX-BXX-CXX-DXX-EXX-FXX**

**A: Full-scale Range Option**

<b>0 1</b>	0 to 5 mils
<b>0 2</b>	0 to 10 mils
<b>0 3</b>	0 to 15 mils
<b>0 4</b>	0 to 20 mils
<b>1 1</b>	0 to 150 µm
<b>1 2</b>	0 to 250 µm
<b>1 3</b>	0 to 400 µm
<b>1 4</b>	0 to 500 µm

**B: Relative Transducer Input Option**

<b>0 1</b>	3300 or 7200 Proximit®
<b>0 2</b>	7200 11 mm (not XL) Proximit
<b>0 3</b>	7200 14 mm or 3300 HTPS Proximit

**C: Agency Approval Option**

Specifications and Ordering Information  
Part Number 141518-01  
Rev. H (05/07)

**0 0** Not required  
**0 1** CSA/NRTL/C

**Note:** CSA/NRTL/C option is only available with relays when the monitor is ordered in a system.

**D:** Intrinsic Safety Barrier Option

**0 0** None  
**0 1** External with Velocity Seismoprobe  
**0 3** External with Velomitor

**Note:** External Safety Barriers must be ordered separately.

**E:** Seismic Transducer/Alarm Relay Option

**0 0** Seismoprobe, no relay  
**0 1** Seismoprobe, Epoxy-sealed  
**0 2** Seismoprobe, Hermetically-sealed  
**0 3** Seismoprobe, Quad Relay (Epoxy-sealed only)  
**0 4** Velomitor, no relay  
**0 5** Velomitor, Epoxy-sealed relay  
**0 6** Velomitor, Hermetically-sealed relay  
**0 7** Velomitor, Epoxy-sealed Quad relay  
**0 8** Spare Monitor - No SIM/SIRM

**F:** Trip Multiply Option

**0 0** None  
**0 1** 2X  
**0 2** 3X

Quad Relays, Velomitor

## Field-programmable Options

These options are field-programmable via plug-in jumpers. **Bold text** indicates options as shipped from the factory.

### Recorder Signal Option

**Relative signal on recorder Channel A, absolute signal on recorder Channel B.**

Relative signal on recorder Channel A, seismic signal on recorder Channel B.

### Bently Nevada Computer Interface Signal Option

**Relative signal on A, absolute signal on B**

Relative signal on A, seismic signal on B

### First Out Option

**Enabled**

Disabled

### Alarm Time Delay Option

0.1 second

1 second

**3 seconds**

6 seconds

### OK Mode Option

**Nonlatching**

Latching

### Timed OK/Channel Defeat Option

**Enabled**

Disabled

### Alert Mode Option

**Latching**

## Spare Relay Module Assemblies

**84139-01**

Seismic No Relays

**84145-01**

Seismic Dual Epoxy Relays

**84151-01**

Seismic Dual Hermetic Relays

**84156-01**

Seismic Quad Relays

**107320-01**

No Relays, Velomitor

**107321-01**

Dual Epoxy Relays, Velomitor

**107322-01**

Dual Hermetic Relays, Velomitor


**107323-01**

Specifications and Ordering Information  
Part Number 141518-01  
Rev. H (05/07)

<b>Danger Mode Option</b>	Nonlatching	Normally de-energized
	Nonlatching	Normally energized
<b>Danger Bypass Switch</b>	<b>Latching</b>	<b>Absolute Alarm Option</b>
	Nonlatching	<b>Danger and Alert enabled</b>
<b>Recorder Output Option</b>	<b>Disabled</b>	<b>Relative Alarm Option</b>
	Enabled	<b>Danger and Alert enabled</b>
	<b>+4 to +20 mA</b>	Alert enabled, Danger disabled
	<b>+1 to +5 Vdc</b>	Danger and Alert disabled
	<b>0 to -10 Vdc</b>	
<b>Recorder Clamping Option</b>	(+4 to +20 mA Option only with Timed OK/Channel Defeat enabled)	<b>Gap Alarm Option</b>
	<b>Not OK = 4 mA</b>	<b>Enabled</b>
	Not OK = 2 mA	Disabled
<b>Alert Relay Mode Option</b>	<b>Not OK = 4 mA</b>	<b>Seismic Transducer OK Check Option</b>
	Not OK = 2 mA	<b>Enabled</b>
	<b>Normally de-energized</b>	Disabled
<b>Danger Relay Mode Option</b>	<b>Normally de-energized</b>	<b>Relative Path Frequency Response Option</b>
	Normally energized	<b>240 to 240,000 cpm</b>
		60 to 36,000 cpm

## Field wiring diagram

3300/65 Dual Probe Monitor

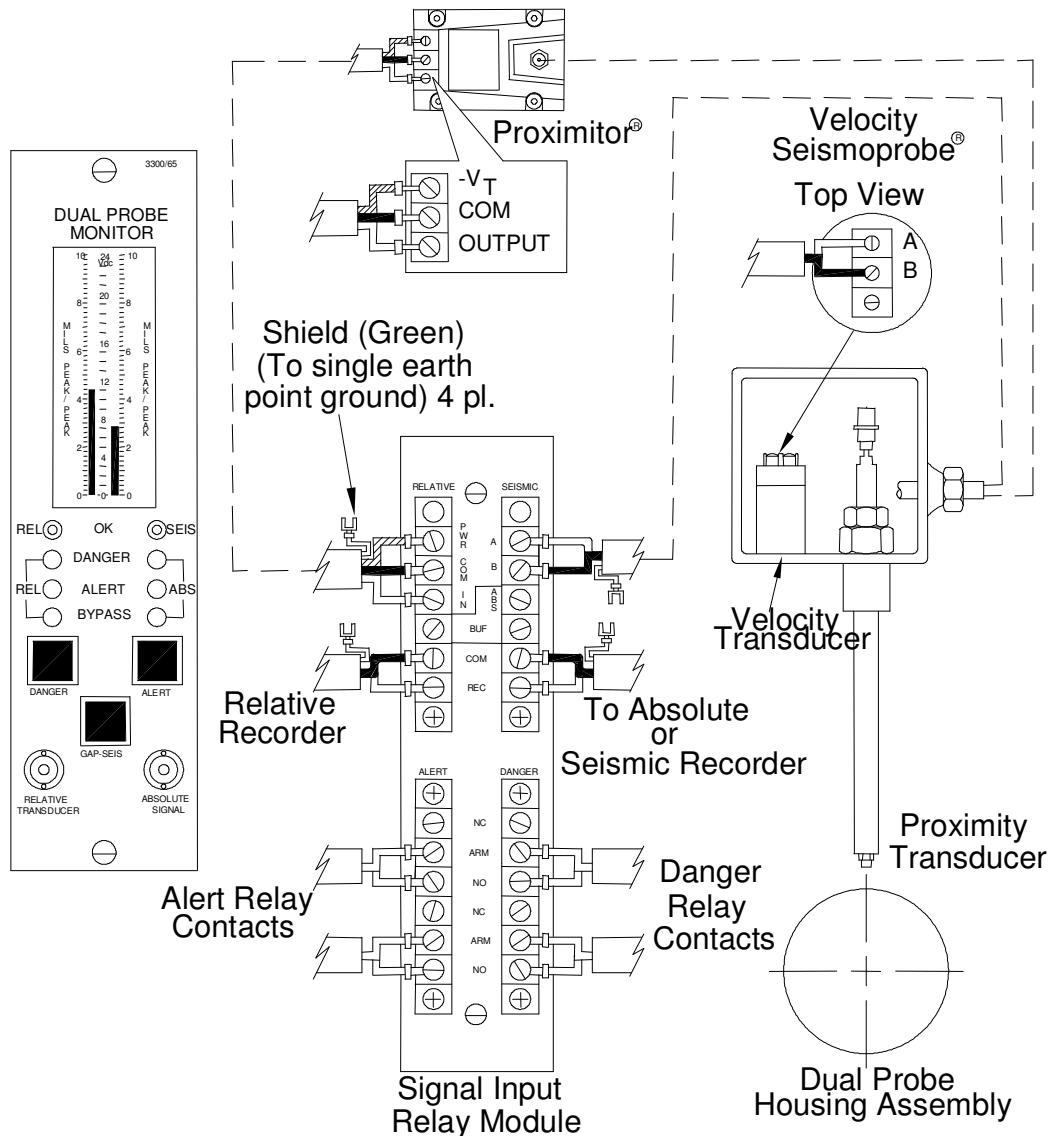

Field wiring diagram for 3300/65 Dual Probe Monitor

Bently Nevada, Seismoprobe, Velomitor and Proximitor are trademarks of General Electric Company.

Copyright 1999 Bently Nevada LLC.  
 1631 Bently Parkway South, Minden, Nevada USA 89423  
 Phone: 775.782.3611 Fax: 775.215.2873  
[www.ge-energy.com/bently](http://www.ge-energy.com/bently)  
 All rights reserved.

Specifications and Ordering Information  
 Part Number 141518-01  
 Rev. H (05/07)

Page 7 of 7

**Artisan Technology Group is an independent supplier of quality pre-owned equipment**

## **Gold-standard solutions**

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

## **We buy equipment**

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

## **Learn more!**

Visit us at [artisantg.com](http://artisantg.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

**We're here to make your life easier. How can we help you today?**

(217) 352-9330 | [sales@artisantg.com](mailto:sales@artisantg.com) | [artisantg.com](http://artisantg.com)

