



Product availability: Stock - Normally stocked in distribution facility



Main

Range of product	Modicon Quantum automation platform
Product or component type	RIO head-end adaptor module

Complementary

Product compatibility	Quantum 200/500/800 series Symax (any mix)
Drops/network	<= 31
I/O words/drop	64 I/64 O
Type of cable	Coaxial 75 Ohm
Transmission rate	1544 Mbit/s
Dynamic range	35 dB
Isolation voltage	500 V DC coaxial center and ground
Electrical connection	1 female connector F elbowed with single cable
Diagnostics startup	Memory check Power up LAN controller check
Power dissipation in W	3 W 1 channel
Marking	CE
Bus current requirement	600 mA 1 channel
Module format	Standard

Environment

Product certifications	FM Class 1 Division 2
Standards	UL 508 CUL CSA C22.2 No 142
Resistance to electrostatic discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2
Resistance to electromagnetic fields	9.14 V/yd (10 V/m) 80...1000 MHz conforming to IEC 801-3
Ambient air temperature for operation	32...140 °F (0...60 °C)
Ambient air temperature for storage	-40...185 °F (-40...85 °C)
Relative humidity	95 % without condensation
Operating altitude	<= 16404.2 ft (5000 m)

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Ordering and shipping details

Category	18155 - QUANTUM I/O & POWER SUPPLIES
Discount Schedule	PC21
GTIN	00785901793113
Nbr. of units in pkg.	1
Package weight(Lbs)	1.1100000000000001
Returnability	Y
Country of origin	FR

Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0901 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Available
California proposition 65	WARNING: This product can expose you to chemicals including:
----- Substance 1	Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm.
----- More information	For more information go to www.p65warnings.ca.gov

Contractual warranty

Warranty period	18 months
-----------------	-----------

Racks for Modules Mounting

Dimensions of Modules and Racks

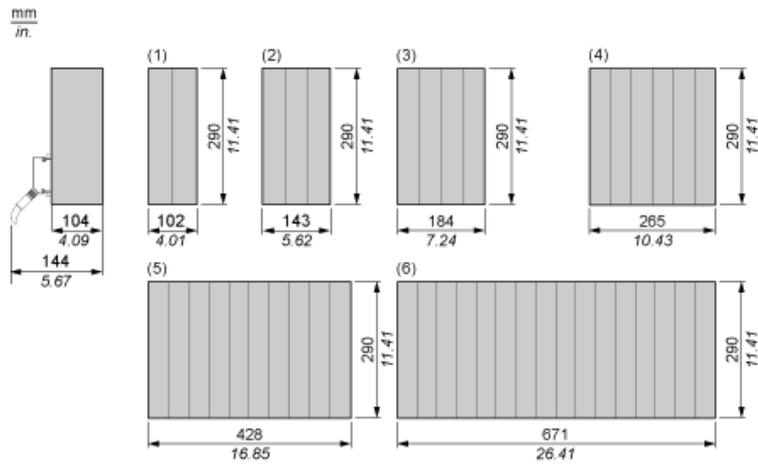

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots