



Main

Range of product	Modicon Quantum automation platform
Product or component type	VAC discrete input modules
Software name	Unity Pro Concept ProWORX 32
Discrete input number	32

Complementary

Group of channels	4
Addressing requirement	2 input words
Discrete input voltage	230 V AC
Input current	≤ 11.5 mA 57...63 Hz ≤ 9.7 mA 47...53 Hz
Voltage state 1 guaranteed	165...264 V AC at 57...63 Hz 175...264 V AC at 47...53 Hz
Voltage state 0 guaranteed	0...40 V AC at 57...63 Hz 0...40 V AC at 47...53 Hz
Input impedance	26500 Ohm capacitive at 57...63 Hz 31800 Ohm capacitive at 47...53 Hz
Network frequency limits	47...63 Hz
Leakage current	≤ 2.6 mA
Absolute maximum input	264 V continuous 312 V 10 s 400 V 1 cycle
Response time	4.9...0.75 ms x line cycle Off-On 7.3...12.3 ms On-Off
Isolation between group	1780 Vrms for 1 minute
Isolation between group and bus	1780 Vrms for 1 minute
Bus current requirement	250 mA
Power dissipation in W	≤ 5 W

Local signalling	1 LED green bus communication is present (Active) 1 LED red external fault detected (F) 32 LEDs green input status
Marking	CE
Module format	Standard
Product weight	0.3 kg

Environment

Standards	CSA C22.2 No 142 UL 508
Product certifications	FM Class 1 Division 2 CUL
Resistance to electrostatic discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2
Resistance to electromagnetic fields	10 V/m 80...2000 MHz conforming to IEC 801-3
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m

Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0922 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold
Product environmental profile	Available End of Life Information
Product end of life instructions	Available

Contractual warranty

Warranty period	18 months
-----------------	-----------

Racks for Modules Mounting


Dimensions of Modules and Racks

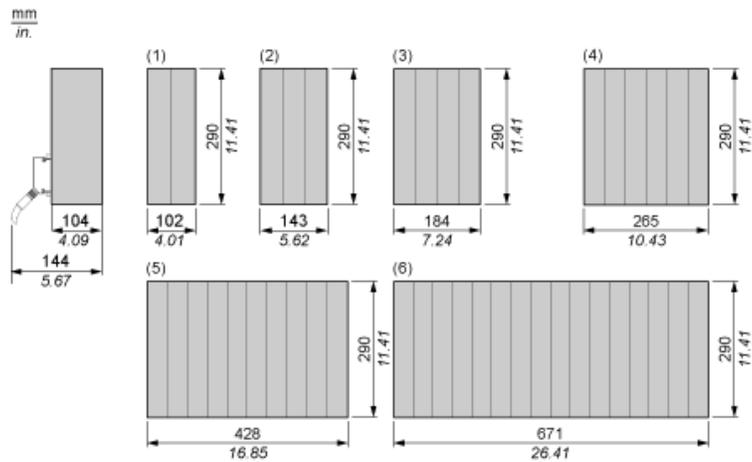

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

230 Vac Discrete Input Module

Wiring Diagram

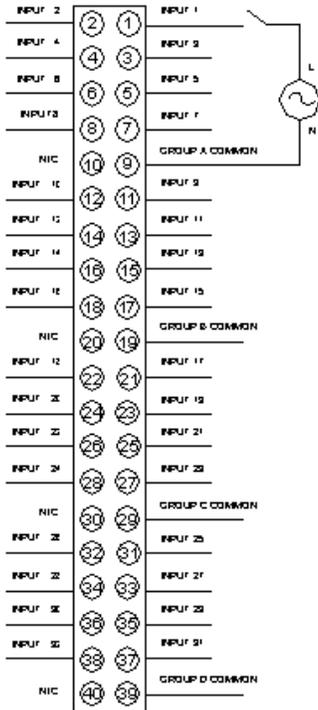

N/C Not Connected

140DAI75300 is replaced by:



Standard environment BMXDAI0805

discrete input module X80 - 8 inputs - 200...240 V AC

Qty 1

Reason for Substitution: End of life | Substitution date: 31 December 2021 | Not same dimensions/design - no equivalent 32-ch 240VAC input (4X8)