


# Shaft-Position Monitor

Emerson’s Dual-Channel Shaft-Position Monitor is designed for small and low channel applications such as small steam, gas, and hydro turbines, and such as compressors, pumps, and fans to measure relative shaft displacement signals. Measurement settings, alarms, and provided outputs are field configurable via software.

Measurement Performance	
Sensor Input Type	Eddy- Current Sensors
Measurement Range	Freely selectable by means of configuration software according to the measuring range of the applied sensors
Frequency Range: Low-Pass Filter	10 Hz
Connection Type: Internal Converter	“LEMO” socket
Environmental	
Shock Limit	20 g pk
Temperature Range	-20 to 65°C (-4 to 149°F)
Sealing	IP65
Agency Ratings	CE
Mechanical	
Case Material / Weight	Aluminum, non-corroding / ~1300 g (45.8 oz.)
Mounting	Wall mount

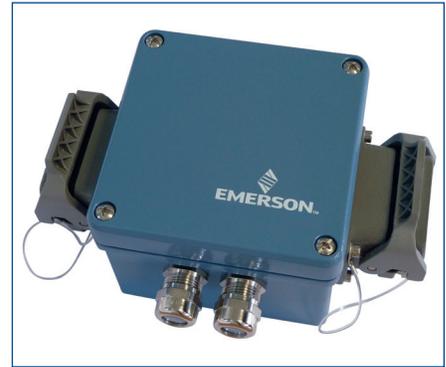


*Shown here is one product option. Other options have slightly different sockets and wiring.*



Electrical		
Supply Voltage		Nominal +24 VDC
	Permissible Voltage Range	+18 to +31.2 VDC
Power Consumption		max. 6 W
Buffered Out: (2x)	Connection	Available at Pins (Cage Terminal)
	Voltage Range	2.0 to 10.0 VDC
	Accuracy	± 2.5%
Current Out: (2x)	Current Range	0/4 to 20 mA (20 to 4/0 mA)
		Galvanically separated
		Open circuit and short-circuit proof
	Maximum Burden	500 Ohm
Relay Out: (5x make contact)	Voltage	$U_{MAX}$ : 48 VDC
	Current	$I_{MAX}$ : 1 A
	Contact Rating	$P_{MAX}$ : 50 W
Compliance and Certifications		
CE		EMC – EN61326-1 2014/30/EU 2014/34/EU 2011/65/EU



A 3210/022-020

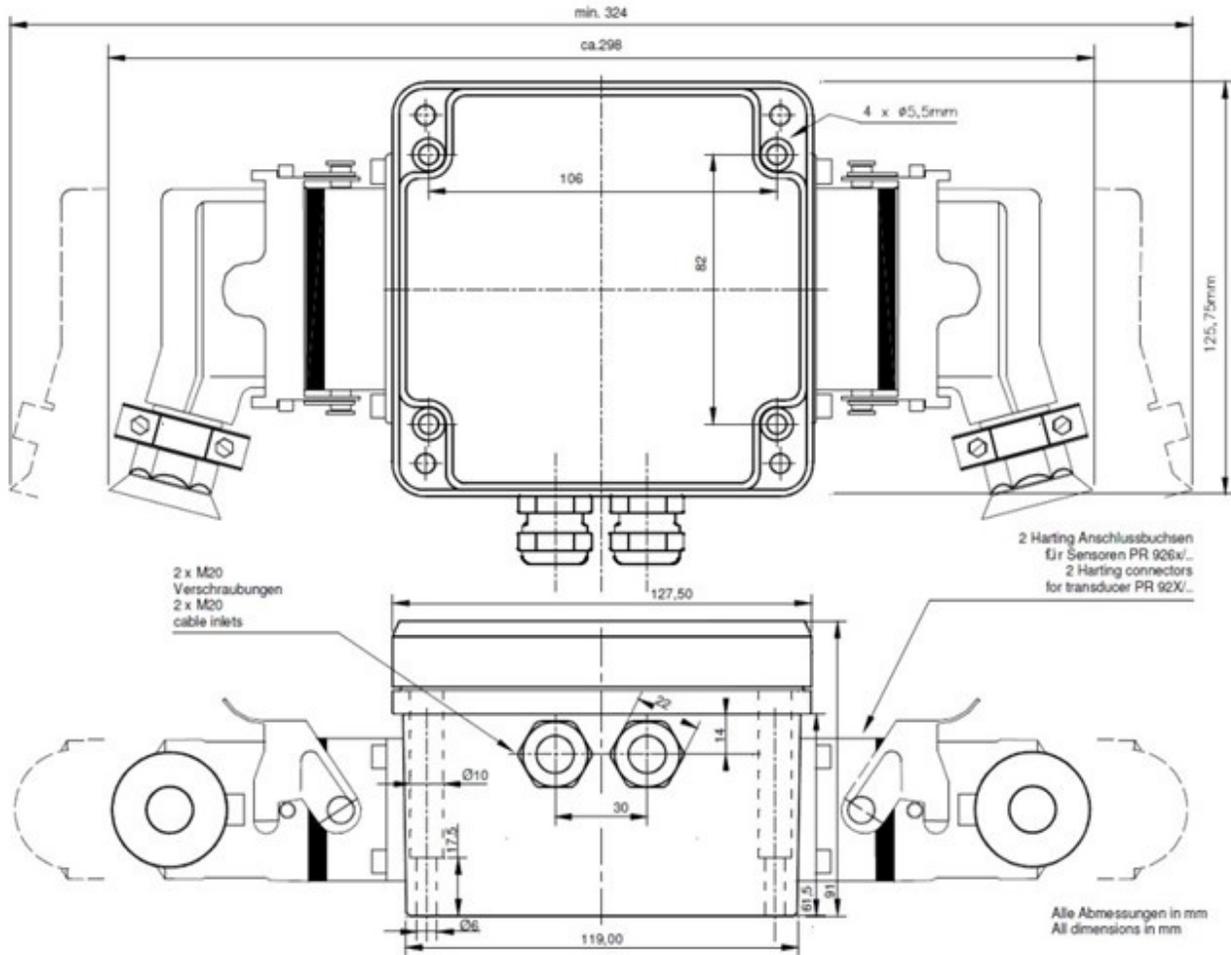

©2020, Emerson. All rights reserved.

The Emerson logo is a trademark and service mark of Emerson Electric Co. All other marks are the property of their respective owners.

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.

**Emerson**  
**Reliability Solutions**  
 835 Innovation Drive  
 Knoxville, TN 37932 USA  
 ☎ +1 865 675 2400

🌐 [www.emerson.com/ams](http://www.emerson.com/ams)

