

# Product data sheet

Specifications



## discrete input module Modicon Quantum - 16 inputs - 24 V AC

140DAI34000C

(!) Discontinued on: May 11, 2021

(!) To be end-of-service on: Dec 31, 2029

(!) Discontinued

### Main

Range of Product	Modicon Quantum automation platform
Product or Component Type	VAC discrete input modules
Software name	Unity Pro Concept ProWORX 32
Discrete input number	16

### Complementary

Group of channels	16
Addressing requirement	1 input word
Discrete input voltage	24 V AC
Input current	12 mA 57...63 Hz 10.7 mA 47...53 Hz
Voltage state 1 guaranteed	16...30 V AC 57...63 Hz 18...30 V AC 47...53 Hz
Voltage state 0 guaranteed	0...6 V 57...63 Hz 0...5 V 47...53 Hz
Input impedance	2600 Ohm capacitive 57...63 Hz 3100 Ohm capacitive 47...53 Hz
Network frequency limits	47...63 Hz
Maximum leakage current	1.9 mA
Absolute maximum input	30 V continuous 32 V 10 s 50 V 1 cycle
Response Time	4.9...0.75 ms x line cycle Off-On 7.3...12.3 ms On-Off
Isolation between channels	1780 Vrms for 1 minute
Isolation between channels and bus	1780 Vrms for 1 minute
Bus current requirement	180 mA
Maximum power dissipation in W	5.5 W
Local signalling	1 LED (green) for bus communication is present (Active) 1 LED (red) for external fault detected (F) 16 LEDs (green) for input status
Marking	CE
Module format	Standard
Net Weight	0.7 lb(US) (0.3 kg)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

## Environment

Protective treatment	Conformal coating Humiseal 1A33
Standards	UL 508 CSA C22.2 No 142
Product Certifications	FM Class 1 Division 2 cUL
Resistance to electrostatic discharge	4 kV contact IEC 801-2 8 kV on air IEC 801-2
Resistance to electromagnetic fields	9.1 V/m (10 V/m) 80...2000 MHz IEC 801-3
Ambient Air Temperature for Operation	32...140 °F (0...60 °C)
Ambient Air Temperature for Storage	-40...185 °F (-40...85 °C)
Relative Humidity	95 % without condensation
Operating altitude	<= 16404.2 ft (5000 m)

## Ordering and shipping details

Category	18155-QUANTUM I/O & POWER SUPPLIES
Discount Schedule	PC21
GTIN	3595861135901
Returnability	No
Country of origin	FR

## Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.0 in (5 cm)
Package 1 Width	6.3 in (16 cm)
Package 1 Length	12.2 in (31 cm)
Package weight(Lbs)	15.2 oz (432 g)

## Contractual warranty

Warranty (in months)	18
----------------------	----



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Use Longer

#### Lifetime extension


Repair

No

## Dimensions Drawings

Racks for Modules Mounting

## Dimensions of Modules and Racks

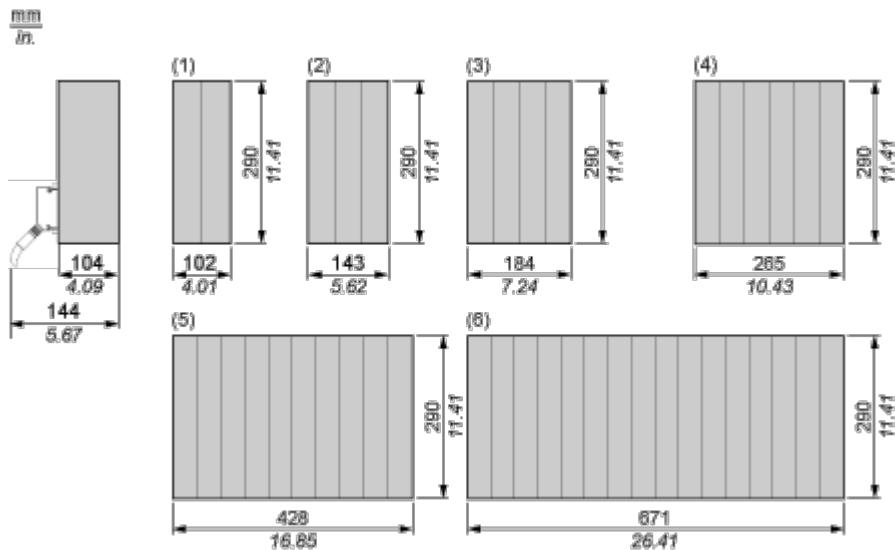

(1) 2 slots

(2) 3 slots

(3) 4 slots

(4) 6 slots


(5) 10 slots

(6) 16 slots

## Connections and Schema

24 Vac Discrete Input Module

## Wiring Diagram

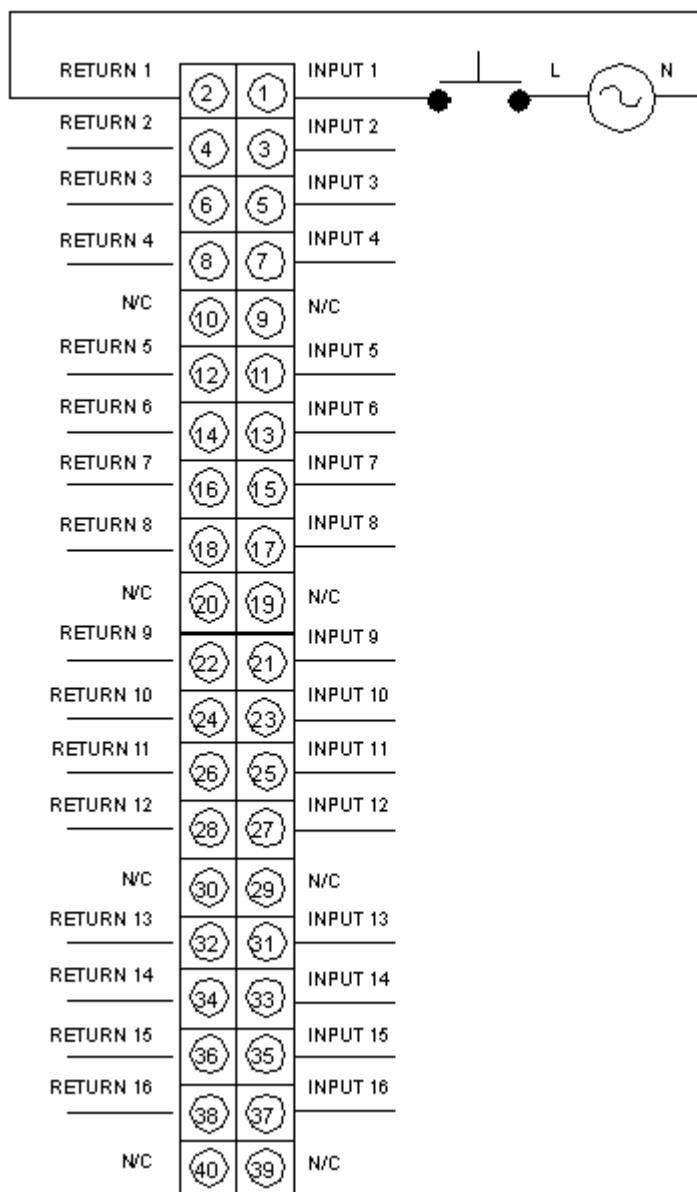

N/C Not Connected