


# Product data sheet

Specifications

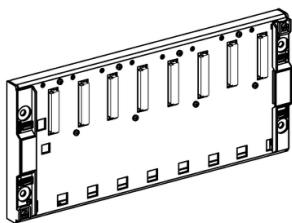

## Non extendable rack, Modicon premium, for single rack configuration, 8 slots

TSXRKY8

⚠ Discontinued on: Dec 2, 2020

⚠ To be end-of-service on: Dec 31, 2026

⚠ Discontinued - Service only

**Product availability: Non-Stock - Not normally stocked in distribution facility**

### Main

Range of Product	Modicon Premium Automation platform
Product or Component Type	Non-extendable rack
Product Specific Application	For single rack configuration

### Complementary

Number of slots	8
Product Compatibility	I/O module TSXP57 processor Specific application module TSXPSY power supply
Fixing mode	By 4 M6 screws (panel) By clips (35 mm symmetrical DIN rail)
Marking	CE
Net Weight	3.86 lb(US) (1.75 kg)

### Environment

Standards	73/23/EEC CSA C22.2 No 213 Class I Division 2 Group B 93/68/EEC 92/31/EEC UL 508 89/336/EEC IEC 61131-2 CSA C22.2 No 213 Class I Division 2 Group D CSA C22.2 No 142 CSA C22.2 No 213 Class I Division 2 Group A CSA C22.2 No 213 Class I Division 2 Group C
Product Certifications	BV LR GL DNV RINA RMRS ABS
Ambient Air Temperature for Operation	32...140 °F (0...60 °C)
Ambient Air Temperature for Storage	-13...158 °F (-25...70 °C)
Relative Humidity	10...95 % without condensation for operation 5...95 % without condensation for storage
Operating altitude	0...6561.68 ft (0...2000 m)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Protective treatment	TC
IP Degree of Protection	IP20
Pollution degree	2

## Ordering and shipping details

Category	US1PC2222558
Discount Schedule	PC22
GTIN	3389110725681
Returnability	No

## Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.0 in (5.0 cm)
Package 1 Width	8.3 in (21.0 cm)
Package 1 Length	16.3 in (41.5 cm)
Package weight(Lbs)	3.543 lb(US) (1.607 kg)

## Contractual warranty

Warranty (in months)	18
----------------------	----



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Use Longer

#### Lifetime extension


Repair

No

## Dimensions Drawings

Standard and Extendable Racks for Modules Mounting

## Dimensions of Modules and Racks

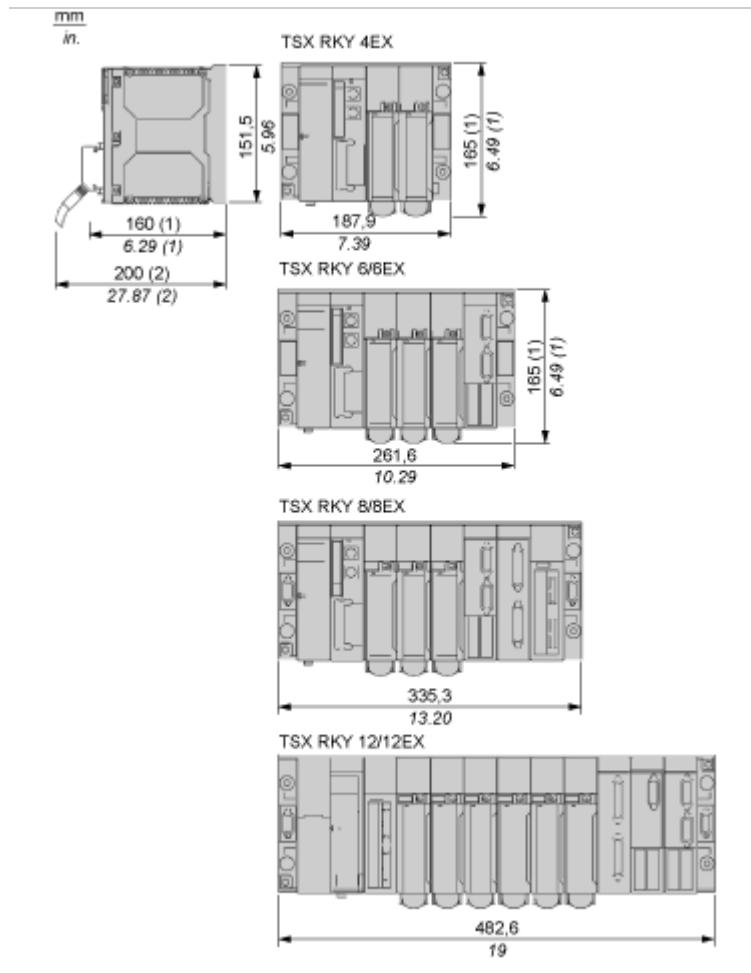


(1) With screw terminal block modules.

(2) Maximum depth for all types of modules and their associated connectors.

## Mounting and Clearance

## Racks Installation Rules

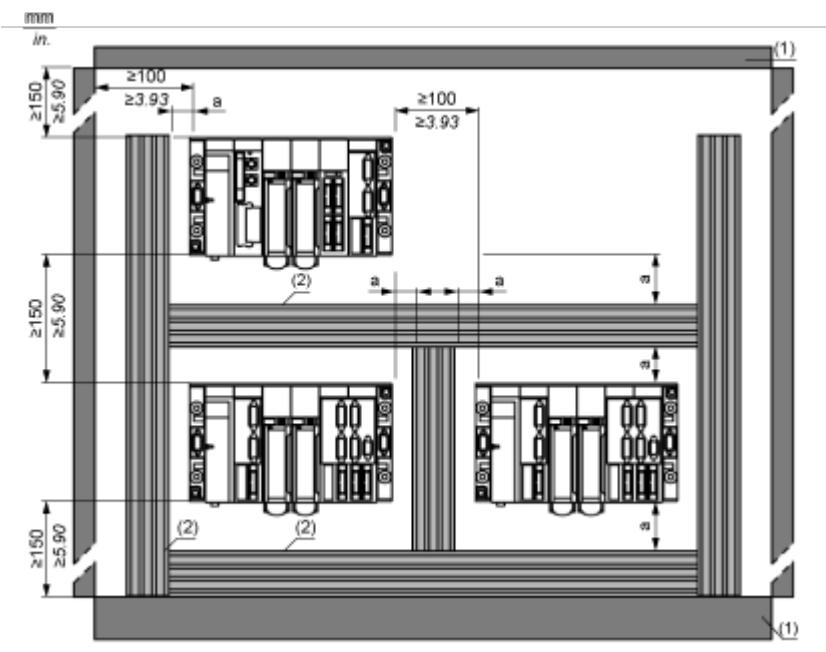

a Greater than or equal to 50 mm / 1.97 in.


(1) Installation or casing

(2) Trough or cable tray

---

**Rules for Installing Racks Fitted with Ventilation Modules**

---

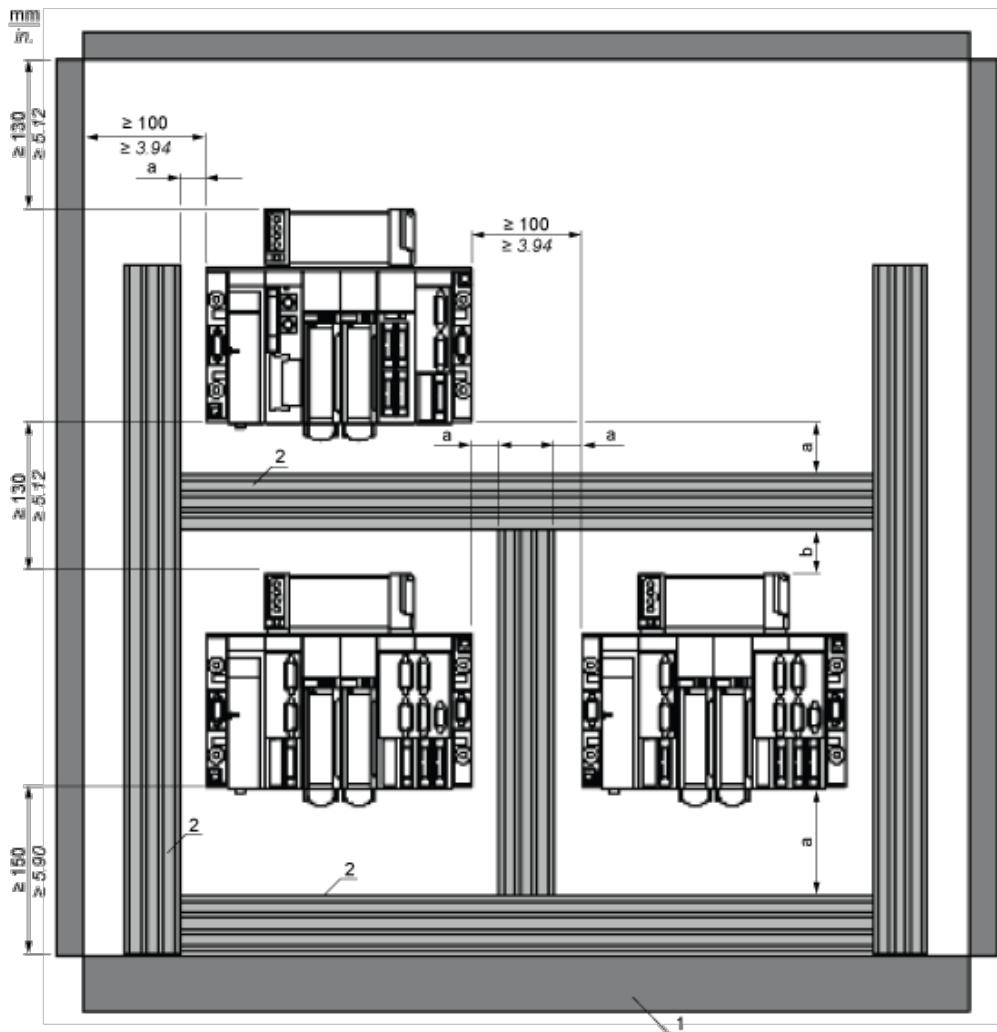

a 50 mm / 1.97 in.


b 30 mm / 1.18 in.

1 Installation or casing

2 Trough or cable tray

**Mounting and Fixing Racks****Mounting on a 35 mm/1.38 in. Wide DIN Rail**

Fixing with four M6x25 screws + washers and AF1-CF56 1/4 turn sliding nuts.

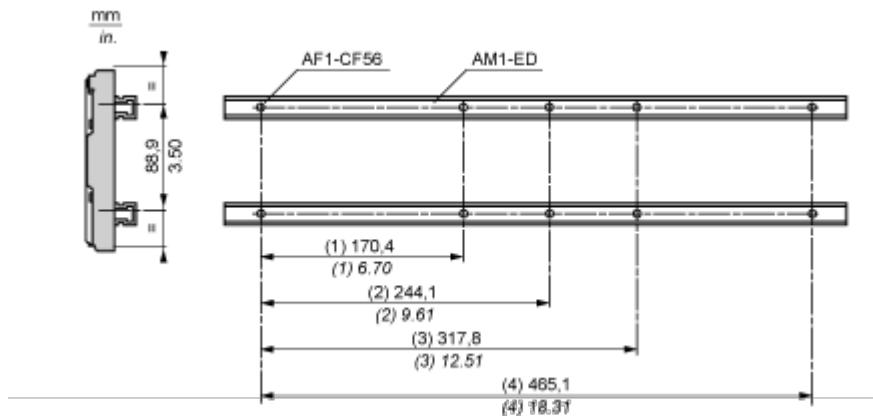


(1) TSXRKY4EX

(2) TSXRKY6 and TSXRK6EX

(3) TSXRKY8 and TSXRKY8EX

(4) TSXRKY12 and TSXRKY12EX

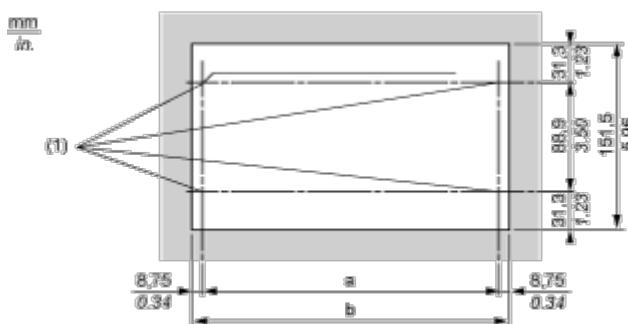
**Mounting on a Panel**

(1) 4 holes for M6 fixing screws

a, b: see table below

**Mounting on an AM1-PA Telequick Mounting Grid**

Fix the rack using four M6x25 screws + washers and AF1-EA6 clips nuts.

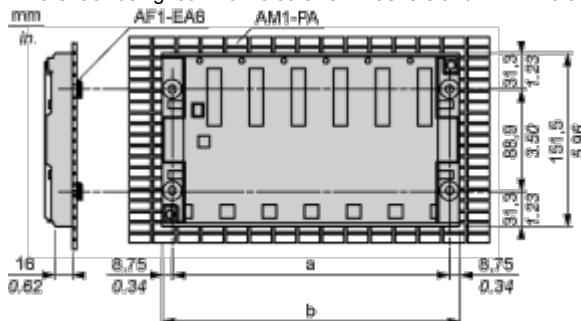

Racks	a in mm	a in in.	b in mm	b in in.
TSXRKY4EX	170.4	6.70	187.9	7.39
TSXRKY6/6EX	244.1	9.61	261.6	10.29


Racks	a in mm	a in in.	b in mm	b in in.
TSXRKY8/8EX	317.8	12.51	335.3	13.20
TSXRKY12/12EX	465.1	18.31	482.6	19

NOTE: Maximum tightening torque for fixing screws: 2.0.N.m.(1.6 Lb.-ft.)

## Connections and Schema

Connection to the Ground

## Grounding Racks

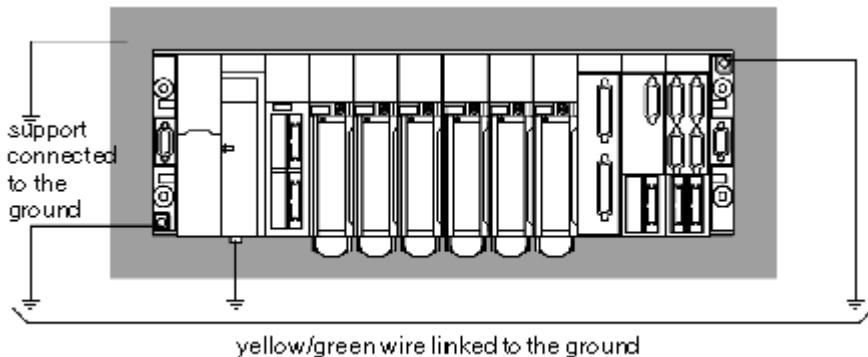

NOTE: The PLC's internal 0 V is linked to the ground connection, the ground connection itself being linked to ground.