

Product data sheet

Specifications



Analog input module, Modicon Premium, 16 high level inputs, 16 bits coversion, 300mA at 5VDC

TSXAEY1614

⚠ Discontinued on: Dec 31, 2018

⚠ To be end-of-service on: Dec 31, 2026

⚠ Discontinued - Service only

Main

Range of Product	Modicon Premium Automation platform
Product or Component Type	Analog input module
Analogue input number	16
Analogue input type	Thermocouple thermocouple B Thermocouple thermocouple E Thermocouple thermocouple J Thermocouple thermocouple K Thermocouple thermocouple L Thermocouple thermocouple N Thermocouple thermocouple R Thermocouple thermocouple S Thermocouple thermocouple T Thermocouple thermocouple U Voltage +/- 80 mV
Analog/digital conversion	16 bits

Complementary

Nominal read cycle time	70 ms per channel
Measurement error	0.8 °C thermocouple E 25 °C 0.9 °C thermocouple J 25 °C 0.9 °C thermocouple L 25 °C 1 °C thermocouple K 25 °C 1 °C thermocouple T 25 °C 1 °C thermocouple U 25 °C 1.1 °C thermocouple N 25 °C 1.2 °C thermocouple E 0...60 °C 1.3 °C thermocouple T 0...60 °C 1.3 °C thermocouple U 0...60 °C 1.4 °C thermocouple J 0...60 °C 1.4 °C thermocouple L 0...60 °C 1.6 °C thermocouple K 0...60 °C 1.7 °C thermocouple N 0...60 °C 2.1 °C thermocouple R 25 °C 2.2 °C thermocouple S 25 °C 2.4 °C thermocouple R 0...60 °C 2.5 °C thermocouple B 25 °C 3.7 °C thermocouple S 0...60 °C 4 °C thermocouple B 0...60 °C
Isolation between channels and bus	1000 Vrms
Isolation between channels and ground	1000 Vrms
Common mode between channels	250 V AC or 280 V AC
Common mode between channels and earth	250 V DC
Input overvoltage protection	-15...15 V at state 0 250 Ohm -30...30 V at state 1 250 Ohm

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Electrical connection	2 connectors SUB-D 25
Overcurrent	-30...30 mA at state 1 250 kOhm
Marking	CE
Current consumption	300 mA 5 V DC
Module format	Standard
Net Weight	0.77 lb(US) (0.35 kg)

Environment

Standards	NFC 42-330 IEC 1131 DIN 43710 IEC 751 DIN 43760 IEC 584
Product Certifications	DNV RMRS LR ABS RINA BV GL
Ambient Air Temperature for Operation	32...140 °F (0...60 °C)
Ambient Air Temperature for Storage	-13...158 °F (-25...70 °C)
Relative Humidity	10...95 % without condensation for operation 5...95 % without condensation for storage
Operating altitude	0...6561.68 ft (0...2000 m)
Protective treatment	TC
IP Degree of Protection	IP20
Pollution degree	2

Ordering and shipping details

Category	22558-TSX PREMIUM, ATRIUM & PL7 PRO
Discount Schedule	PC22
GTIN	3389110876321
Returnability	No
Country of origin	FR

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.2 in (5.5 cm)
Package 1 Width	7.09 in (18.0 cm)
Package 1 Length	10.2 in (26.0 cm)
Package weight(Lbs)	15.8 oz (447.0 g)

Contractual warranty

Warranty (in months)	18
-----------------------------	----



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better

Materials and Substances

California proposition 65

WARNING: This product can expose you to chemicals including: Lead and lead compounds which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov

Use Longer

Lifetime extension


Repair

No

Dimensions Drawings

Standard and Extendable Racks for Modules Mounting

Dimensions of Modules and Racks

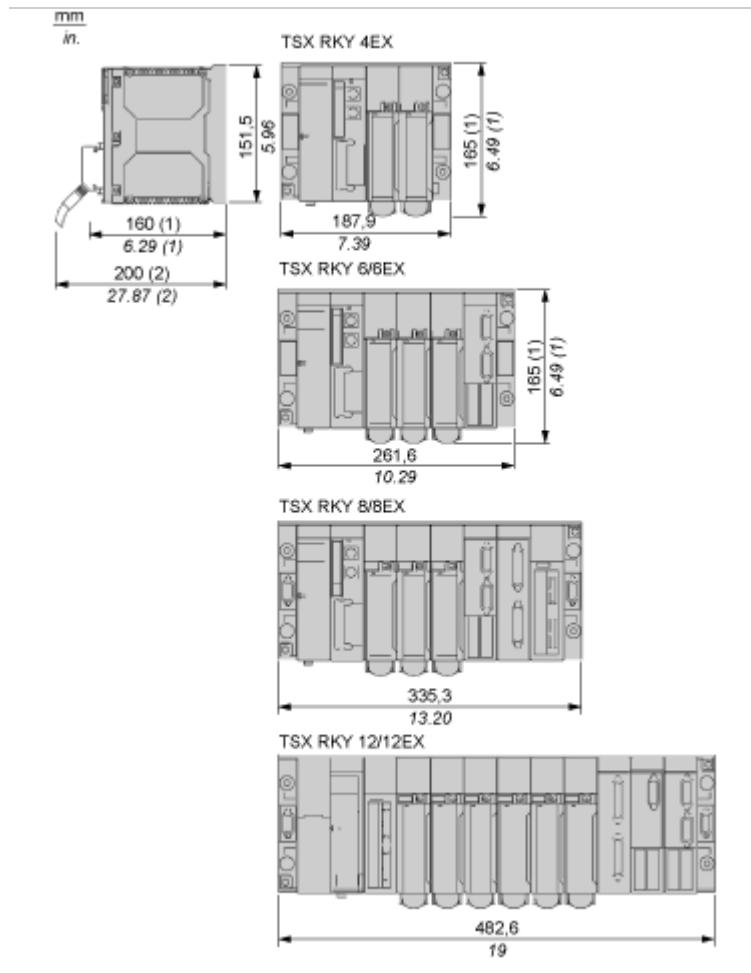


(1) With screw terminal block modules.

(2) Maximum depth for all types of modules and their associated connectors.

Connections and Schema

Analog Input Module (16-Channel, Voltage/Thermocouple)

Connector Pin Assignment

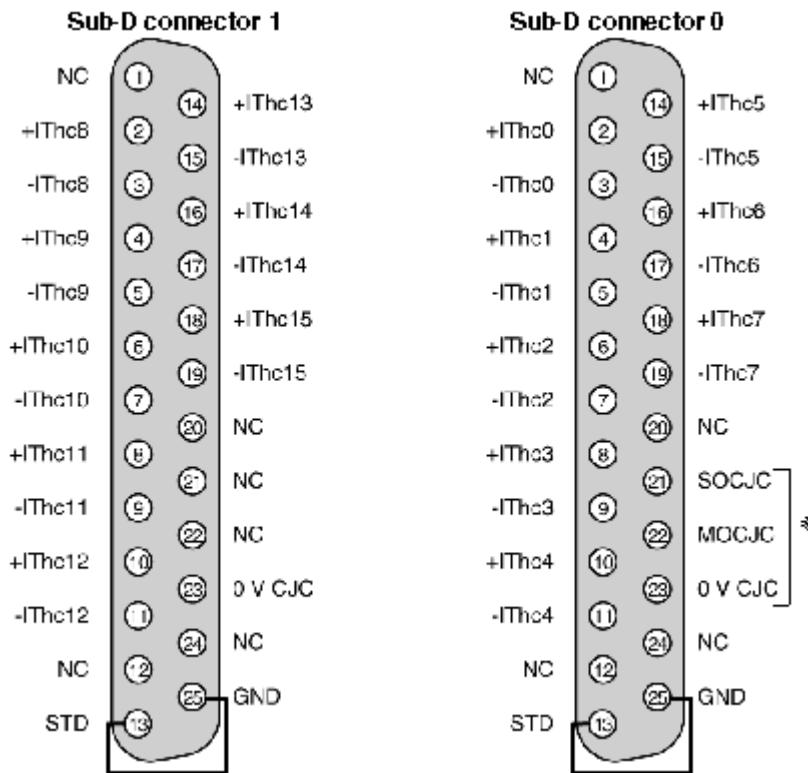

NC Pin not connected

+ITHcx + input of the thermocouple for channel x

-ITHcx - input of the thermocouple for channel x

SOCJC Power supply output for internal cold junction compensation by TELEFAST

MOCJC Input for internal cold junction compensation measurement by TELEFAST

STD The strap between pins 13 and 25 enables any removal of the connector to be detected.

* For internal cold junction compensation