



Main

Range of product	Modicon Premium Automation platform
Product or component type	Single-format PL7 processor
Software designation	PL7 Junior/Pro

Complementary

Number of racks	2 12 slots 4 4/6/8 slots
Number of slots	16 24 32
Discrete I/O processor capacity	512 I/O
Analogue I/O processor capacity	24 I/O
Number of application specific channel	<= 8
Integrated connection type	Non isolated serial link 2 female mini DIN 19.2 kbit/s
Communication module processor capacity	1 CANopen 1 network module 2 AS-Interface bus modules
Memory description	Internal RAM (with PCMCIA card) 32 Kwords data Internal RAM (without PCMCIA card) 32 Kwords program and data PCMCIA card 128 Kwords additional data storage PCMCIA card 64 Kwords program
Maximum size of object areas	30.5 %MWi internal words located internal data 32 %KWi constant words located internal data 4096 %Mi located internal bits
Application structure	32 event tasks 1 fast task 1 master task
Execution time per instruction	0.5 µs Boolean without PCMCIA card 0.6 µs Boolean with PCMCIA card 0.62 µs word or fixed-point arithmetic without PCMCIA card 0.87 µs word or fixed-point arithmetic with PCMCIA card 44 µs floating points with PCMCIA card 44 µs floating points without PCMCIA card
Number of instructions per ms	0.85 Kinst/ms 65 % Boolean + 35 % fixed arithmetic with PCMCIA card 1.05 Kinst/ms 65 % Boolean + 35 % fixed arithmetic without PCMCIA card 1.18 Kinst/ms 100 % Boolean with PCMCIA card 1.52 Kinst/ms 100 % Boolean without PCMCIA card

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

System overhead	0.8 ms fast task 1.5 ms master task
Marking	CE
Local signalling	1 LED green processor running (RUN) 1 LED red I/O module or configuration fault (I/O) 1 LED red processor or system fault (ERR) 1 LED yellow activity on the terminal port (TER)
Current consumption	440 mA 5 V DC
Module format	Standard
Product weight	0.38 kg

Environment

Standards	CSA C22.2 No 213 Class I Division 2 Group C CSA C22.2 No 213 Class I Division 2 Group D 89/336/EEC IEC 61131-2 73/23/EEC CSA C22.2 No 213 Class I Division 2 Group A 92/31/EEC CSA C22.2 No 213 Class I Division 2 Group B 93/68/EEC UL 508 CSA C22.2 No 142
Product certifications	RINA BV DNV ABS RMRS GL LR
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-25...70 °C
Relative humidity	10...95 % without condensation for operation 5...95 % without condensation for storage
Operating altitude	0...2000 m
Protective treatment	TC
IP degree of protection	IP20
Pollution degree	2

Offer Sustainability


RoHS (date code: YYWW)	Compliant - since 0933 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold
Product end of life instructions	Need no specific recycling operations

Contractual warranty

Warranty period	18 months
-----------------	-----------

Standard and Extendable Racks for Modules Mounting

Dimensions of Modules and Racks

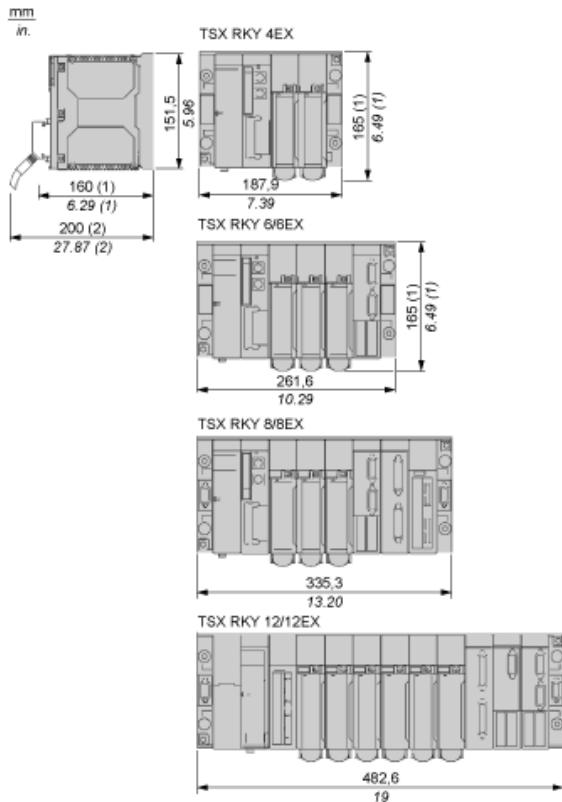

(1) With screw terminal block modules.

(2) Maximum depth for all types of modules and their associated connectors.

TSXP57103M is replaced by:



Standard environment BMXP342020

processor module M340 - max 1024 discrete + 256 analog I/O - Modbus - Ethernet

Qty 1

Reason for Substitution: End of life | Substitution date: 31 December 2018 | Not same dimensions/design - better performances, more services provided
