


Connector cable 6ES5734-2BD20

The figure below illustrates the cable for a connector between a PG 7xx and the programmable controllers from AG 90 U to AG 155 U.

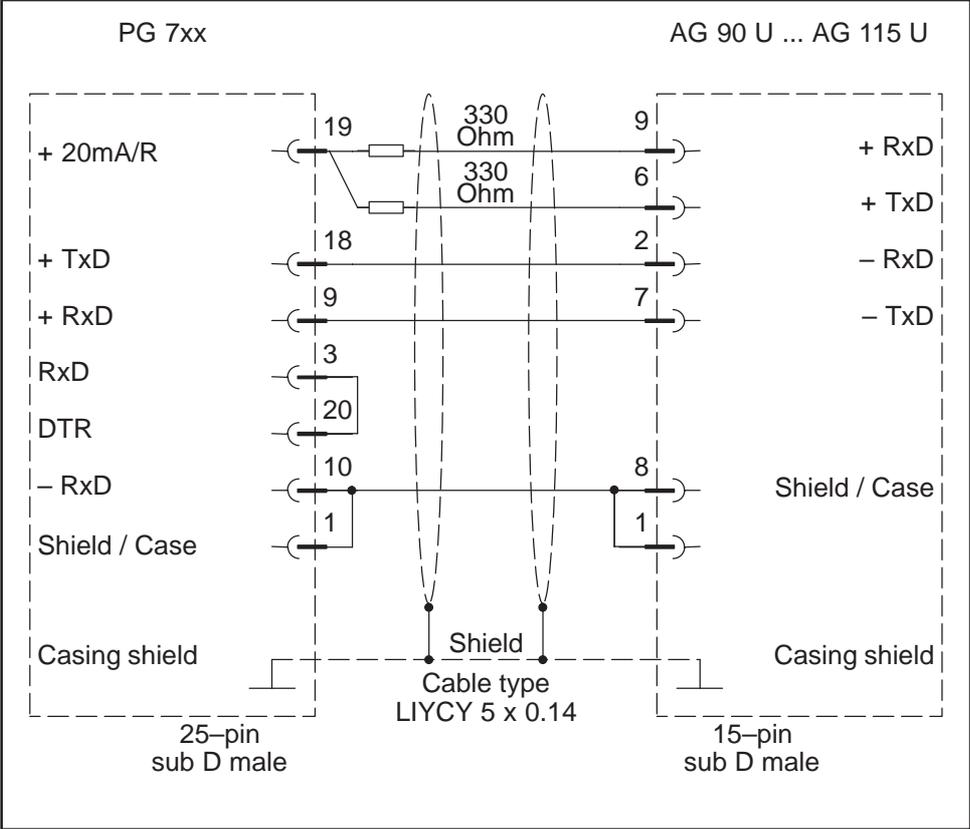

Topic

Please note that you must only use shielded connector casings. A large sur-B face area of both sides of the cable shield must be in contact with the connector casing.

The maximum length of the connector cable amounts to 1000 m.