

Product availability : Stock - Normally stocked in distribution facility



Price* : 1963.05 USD



Main

Range of product	Modicon Quantum automation platform
Product or component type	Dc discrete input modules
Discrete input number	32

Complementary

Group of channels	4
Logic input	Positive (sink)
Input voltage limits	10..60 V
Input voltage	12 V 5...10 mA DC 24 V 6...30 mA DC 48 V 2...15 mA DC 60 V 1...5 mA DC
Voltage state 1 guaranteed	11...24 V 24 V - 15...20 % 34...48 V 48 V - 15...20 % 45...60 V 60 V - 15...20 % 9...12 V 12 V +/- 5 %
Voltage state 0 guaranteed	0...10 V 48 V - 15...20 % 0...12.5 V 60 V - 15...20 % 0...5 V 24 V - 15...20 % 0...1.8 V 12 V +/- 5 %
Absolute maximum voltage	75 V
Addressing requirement	2 input words
Response time	4 ms from state 0 to state 1 4 ms from state 1 to state 0
Switching frequency	<= 100 Hz
Isolation between group and bus	2500 Vrms DC for 1 minute
Isolation between group	700 Vrms DC for 1 minute
Power dissipation	1 W + (0.25 x number of points on)
Marking	CE

Local signalling	1 LED green bus communication is present (Active) 32 LEDs green input status
Bus current requirement	300 mA
Module format	Standard
Product weight	0.65 lb(US) (0.295 kg)

Environment

Standards	EN/IEC 61131-2 CSA C22.2 No 142 UL 508
Product certifications	EAC CE RCM Hazardous location class 1, division 2 CSA Merchant Navy UL
Resistance to electrostatic discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2
Resistance to electromagnetic fields	9.14 V/yd (10 V/m) 80...2000 MHz conforming to IEC 801-3
Ambient air temperature for operation	32...140 °F (0...60 °C)
Ambient air temperature for storage	-40...185 °F (-40...85 °C)
Relative humidity	95 % without condensation
Operating altitude	<= 16404.2 ft (5000 m)

Ordering and shipping details

Category	18155 - QUANTUM I/O & POWER SUPPLIES
Discount Schedule	PC21
GTIN	00785901794561
Nbr. of units in pkg.	1
Package weight(Lbs)	0.95999999999999996
Returnability	Y
Country of origin	CN

Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0901 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Available

Contractual warranty

Warranty period	18 months
-----------------	-----------

Racks for Modules Mounting

Dimensions of Modules and Racks

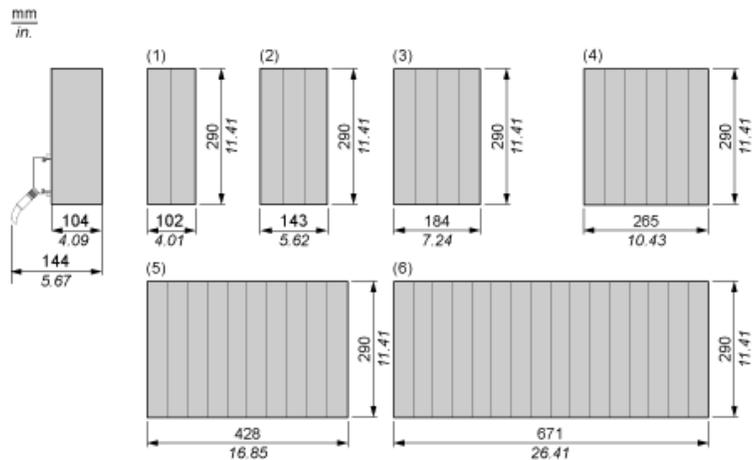

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

10...60 Vdc Discrete Input Sink Module

Wiring Diagram

